





2


Solenoid - Differential (Monostable)

5/2

Ordering code	
23E.C.52.00.36.V	
ELECTRICAL CONTACTS	
E	0=STANDARD-only one electric signal
	1=CEB (Bistable Electrical contacts)-(two electrical signals)
ELECTRICAL CONTACTS	
C	4=Quick connection for tube Ø4
	6=Quick connection for tube Ø6
	8=Quick connection for tube Ø8
VOLTAGE	
V	02=24 VDC PNP
	12=24 VDC NPN

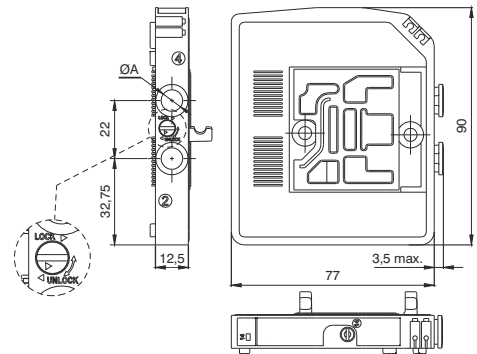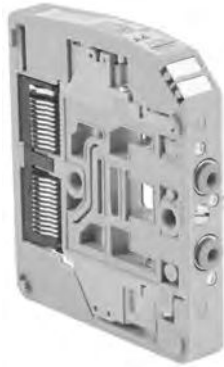

SHORT FUNCTION CODE B4
 SHORT FUNCTION CODE B6
 SHORT FUNCTION CODE B8
 SHORT FUNCTION CODE R4 (CEB)




SHORT FUNCTION CODE R6 (CEB)
 SHORT FUNCTION CODE R8 (CEB)
 Shifting time of pneumatic directional control valves or moving parts, logic devices were measured in accordance to ISO 12238:2001, Pneumatic fluid power - Directional control valves - Measurement of shifting time.

Operational characteristic							
Fluid	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Response time according to ISO 12238, activation time (ms)	Response time according to ISO 12238, deactivation time (ms)	Working pressure (bar)	Pressure range (bar)	Temperature °C	Weight (gr.)
Filtered air, with or without lubrication	700	12	15	From vacuum to 10	2,5 to 7	-5 ÷ +50	115


Solenoid - Spring (Monostable)

5/2

Ordering code	
23E.C.52.00.39.V	
ELECTRICAL CONTACTS	
E	0=STANDARD-only one electric signal
	1=CEB (Bistable Electrical contacts)-(two electrical signals)
ELECTRICAL CONTACTS	
C	4=Quick connection for tube Ø4
	6=Quick connection for tube Ø6
	8=Quick connection for tube Ø8
VOLTAGE	
V	02=24 VDC PNP
	12=24 VDC NPN

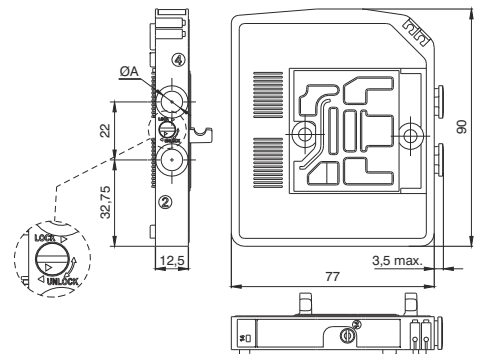

SHORT FUNCTION CODE A4
 SHORT FUNCTION CODE A6
 SHORT FUNCTION CODE A8
 SHORT FUNCTION CODE P4 (CEB)




SHORT FUNCTION CODE P6 (CEB)
 SHORT FUNCTION CODE P8 (CEB)
 Shifting time of pneumatic directional control valves or moving parts, logic devices were measured in accordance to ISO 12238:2001, Pneumatic fluid power - Directional control valves - Measurement of shifting time.

Operational characteristic							
Fluid	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Response time according to ISO 12238, activation time (ms)	Response time according to ISO 12238, deactivation time (ms)	Working pressure (bar)	Pressure range (bar)	Temperature °C	Weight (gr.)
Filtered air, with or without lubrication	700	9	30	From vacuum to 10	2,5 to 7	-5 ÷ +50	115

Solenoid - Solenoid (Bistable)

5/2

Ordering code	
230C.52.00.35.V	
ELECTRICAL CONTACTS	
C	4=Quick connection for tube Ø4
	6=Quick connection for tube Ø6
	8=Quick connection for tube Ø8
VOLTAGE	
V	02=24 VDC PNP
	12=24 VDC NPN

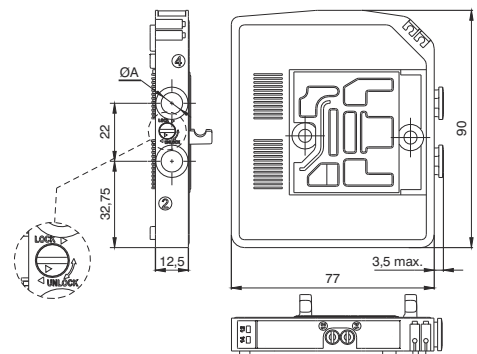

SHORT FUNCTION CODE C4
 SHORT FUNCTION CODE C6
 SHORT FUNCTION CODE C8



Shifting time of pneumatic directional control valves or moving parts, logic devices were measured in accordance to ISO 12238:2001, Pneumatic fluid power - Directional control valves - Measurement of shifting time.

Operational characteristic							
Fluid	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Response time according to ISO 12238, activation time (ms)	Response time according to ISO 12238, deactivation time (ms)	Working pressure (bar)	Pressure range (bar)	Temperature °C	Weight (gr.)
Filtered air, with or without lubrication	700	7	7	From vacuum to 10	2,5 to 7	-5 ÷ +50	115

Solenoid - Solenoid (Bistable-Closed centres)

5/3

Ordering code


230C.53.31.35.V

ELECTRICAL CONTACTS


- C** 4=Quick connection for tube Ø4
- 6=Quick connection for tube Ø6
- 8=Quick connection for tube Ø8

VOLTAGE

- V** 02=24 VDC PNP
- 12=24 VDC NPN

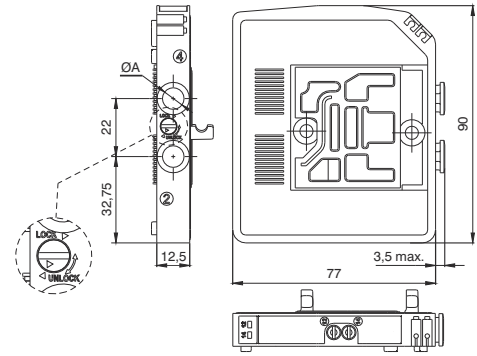

SHORT FUNCTION CODE E4
SHORT FUNCTION CODE E6
SHORT FUNCTION CODE E8



"Shifting time of pneumatic directional control valves or moving parts, logic devices were measured in accordance to ISO 12238:2001, Pneumatic fluid power - Directional control valves - Measurement of shifting time."

Operational characteristic

Fluid	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Response time according to ISO 12238, activation time (ms)	Response time according to ISO 12238, deactivation time (ms)	Working pressure (bar)	Pressure range (bar)	Temperature °C	Weight (gr.)
Filtered air, with or without lubrication	550	15	15	From vacuum to 10	2,5 to 7	-5 ÷ +50	130


2




Solenoid - Solenoid 2x3/2 Bistable-Normally Closed-Normally Closed (=5/3 Open centres)

6/2

Ordering code	
230 .62.44.35	
ELECTRICAL CONTACTS	
	4=Quick connection for tube Ø4
	6=Quick connection for tube Ø6
	8=Quick connection for tube Ø8
VOLTAGE	
	02=24 VDC PNP
	12=24 VDC NPN

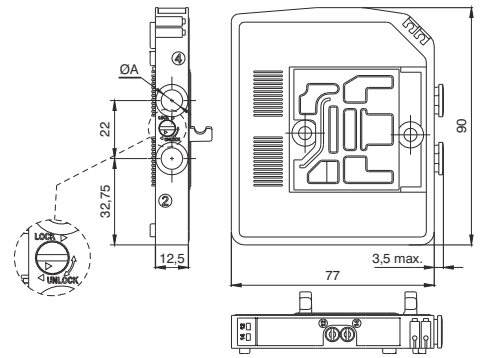

*5/3 Open Centres: Use the Solenoid valves with 2x3/2 NC-NC function
 *5/3 Pressured Centres: Use the Solenoid valves with 2x3/2 NO-NO function
 SHORT FUNCTION CODE F4
 SHORT FUNCTION CODE F6



SHORT FUNCTION CODE F8


"Shifting time of pneumatic directional control valves or moving parts, logic devices were measured in accordance to ISO 12238:2001, Pneumatic fluid power - Directional control valves - Measurement of shifting time."

Operational characteristic							
Fluid	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Response time according to ISO 12238, activation time (ms)	Response time according to ISO 12238, deactivation time (ms)	Working pressure (bar)	Pressure range (bar)	Temperature °C	Weight (gr.)
Filtered air, with or without lubrication	700	9	30	From vacuum to 10	2,5 to 7	-5 ÷ +50	130


Solenoid - Solenoid 2x3/2 Bistable-Normally Closed-Normally Open

6/2

Ordering code	
230 .62.45.35	
ELECTRICAL CONTACTS	
	4=Quick connection for tube Ø4
	6=Quick connection for tube Ø6
	8=Quick connection for tube Ø8
VOLTAGE	
	02=24 VDC PNP
	12=24 VDC NPN

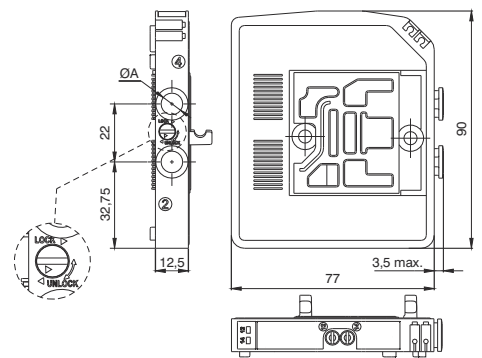

*5/3 Open Centres: Use the Solenoid valves with 2x3/2 NC-NC function
 *5/3 Pressured Centres: Use the Solenoid valves with 2x3/2 NO-NO function
 SHORT FUNCTION CODE H4
 SHORT FUNCTION CODE H6:



SHORT FUNCTION CODE H8


"Shifting time of pneumatic directional control valves or moving parts, logic devices were measured in accordance to ISO 12238:2001, Pneumatic fluid power - Directional control valves - Measurement of shifting time."

Operational characteristic							
Fluid	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Response time according to ISO 12238, activation time (ms)	Response time according to ISO 12238, deactivation time (ms)	Working pressure (bar)	Pressure range (bar)	Temperature °C	Weight (gr.)
Filtered air, with or without lubrication	700	9	30	From vacuum to 10	2,5 to 7	-5 ÷ +50	130


Solenoid - Solenoid 2x3/2 Bistable-Normally Open-Normally Open (=5/3 Pressured centres)

6/2

Ordering code	
230 .62.55.35	
ELECTRICAL CONTACTS	
	4=Quick connection for tube Ø4
	6=Quick connection for tube Ø6
	8=Quick connection for tube Ø8
VOLTAGE	
	02=24 VDC PNP
	12=24 VDC NPN

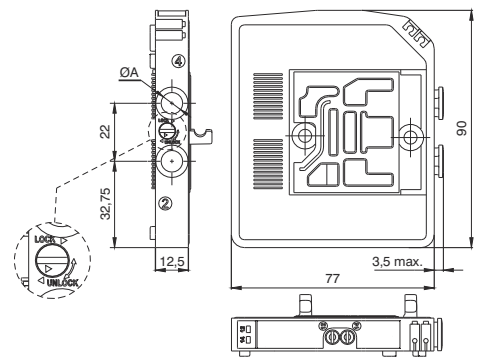

*5/3 Open Centres: Use the Solenoid valves with 2x3/2 NC-NC function
 *5/3 Pressured Centres: Use the Solenoid valves with 2x3/2 NO-NO function
 SHORT FUNCTION CODE G4
 SHORT FUNCTION CODE G6



SHORT FUNCTION CODE G8

"Shifting time of pneumatic directional control valves or moving parts, logic devices were measured in accordance to ISO 12238:2001, Pneumatic fluid power - Directional control valves - Measurement of shifting time."

Operational characteristic							
Fluid	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Response time according to ISO 12238, activation time (ms)	Response time according to ISO 12238, deactivation time (ms)	Working pressure (bar)	Pressure range (bar)	Temperature °C	Weight (gr.)
Filtered air, with or without lubrication	700	9	30	From vacuum to 10	2,5 to 7	-5 ÷ +50	130

2


Solenoid - Solenoid 2x2/2 Bistable-Normally Closed-Normally Closed

4/2


Ordering code
230C.42.44.35.V

ELECTRICAL CONTACTS
 C 4=Quick connection for tube Ø4
 6=Quick connection for tube Ø6
 8=Quick connection for tube Ø8

VOLTAGE
 V 02=24 VDC PNP
 12=24 VDC NPN

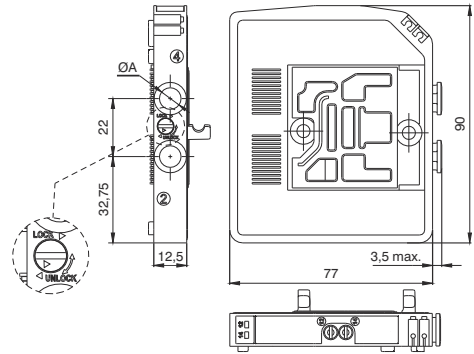

SHORT FUNCTION CODE L4
 SHORT FUNCTION CODE L6
 SHORT FUNCTION CODE L8



Shifting time of pneumatic directional control valves or moving parts, logic devices were measured in accordance to ISO 12238:2001, Pneumatic fluid power - Directional control valves - Measurement of shifting time.

Operational characteristic							
Fluid	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Response time according to ISO 12238, activation time (ms)	Response time according to ISO 12238, deactivation time (ms)	Working pressure (bar)	Pressure range (bar)	Temperature °C	Weight (gr.)
Filtered air, with or without lubrication	700	9	30	From vacuum to 10	2,5 to 7	-5 ÷ +50	130


Solenoid - Solenoid 2x2/2 Bistable-Normally Closed-Normally Open

4/2


Ordering code
230C.42.45.35.V

ELECTRICAL CONTACTS
 C 4=Quick connection for tube Ø4
 6=Quick connection for tube Ø6
 8=Quick connection for tube Ø8

VOLTAGE
 V 02=24 VDC PNP
 12=24 VDC NPN

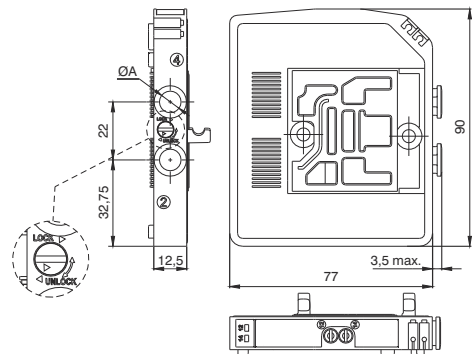

SHORT FUNCTION CODE N4
 SHORT FUNCTION CODE N6
 SHORT FUNCTION CODE N8



Shifting time of pneumatic directional control valves or moving parts, logic devices were measured in accordance to ISO 12238:2001, Pneumatic fluid power - Directional control valves - Measurement of shifting time.

Operational characteristic							
Fluid	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Response time according to ISO 12238, activation time (ms)	Response time according to ISO 12238, deactivation time (ms)	Working pressure (bar)	Pressure range (bar)	Temperature °C	Weight (gr.)
Filtered air, with or without lubrication	700	9	30	From vacuum to 10	2,5 to 7	-5 ÷ +50	130


Solenoid - Solenoid 2x2/2 Bistable-Normally Open-Normally Open

4/2


Ordering code
230C.42.55.35.V

ELECTRICAL CONTACTS
 C 4=Quick connection for tube Ø4
 6=Quick connection for tube Ø6
 8=Quick connection for tube Ø8

VOLTAGE
 V 02=24 VDC PNP
 12=24 VDC NPN

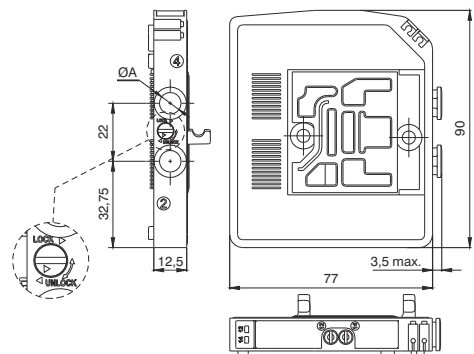

SHORT FUNCTION CODE M4
 SHORT FUNCTION CODE M6
 SHORT FUNCTION CODE M8




Shifting time of pneumatic directional control valves or moving parts, logic devices were measured in accordance to ISO 12238:2001, Pneumatic fluid power - Directional control valves - Measurement of shifting time.

Operational characteristic							
Fluid	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Response time according to ISO 12238, activation time (ms)	Response time according to ISO 12238, deactivation time (ms)	Working pressure (bar)	Pressure range (bar)	Temperature °C	Weight (gr.)
Filtered air, with or without lubrication	700	9	30	From vacuum to 10	2,5 to 7	-5 ÷ +50	130

Endplates 5 ports

Ordering code
2311.05C

CONNECTIONS
 C P=Electrical connection PNP
 N=Electrical connection NPN

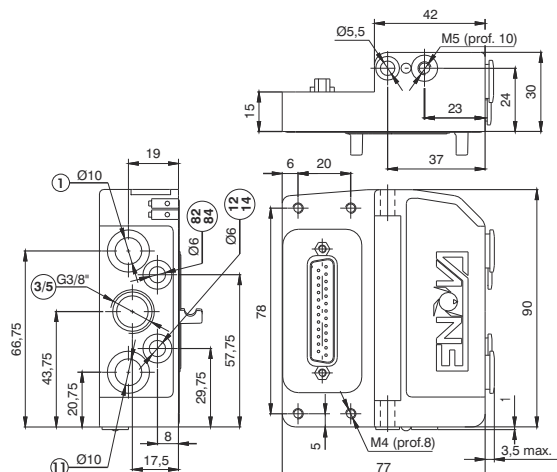12/14 Conduit (tube ø6): Pilot feeding (pressure from 2.5 to 7 bar)
 82/84 Conduit (tube ø6): Pilot exhaust


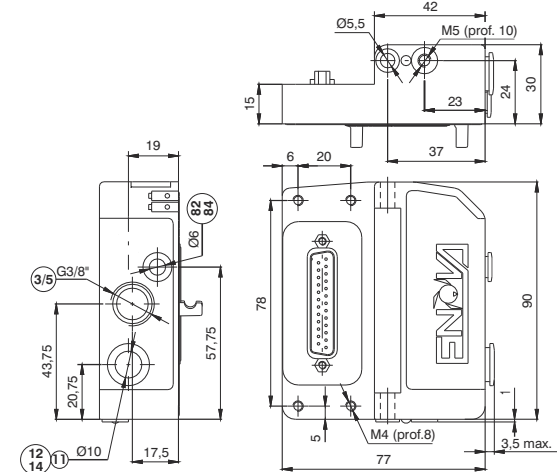
1/11 Conduit (tube ø10): Main Solenoid valve feeding (pressure from vacuum to 10 bar maximum)
 3/5 Conduit (G 3/8\"): Main Solenoid valve exhaust

Operational characteristic	Fluid	Temperature °C	Working pressure (bar)	Pressure range (bar)	Weight (gr.)
	Filtered air, with or without lubrication	-5 ÷ +50	From vacuum to 10	2,5 to 7	190

Endplates 3 ports

Ordering code
2311.03C

CONNECTIONS
 C P=Electrical connection PNP
 N=Electrical connection NPN


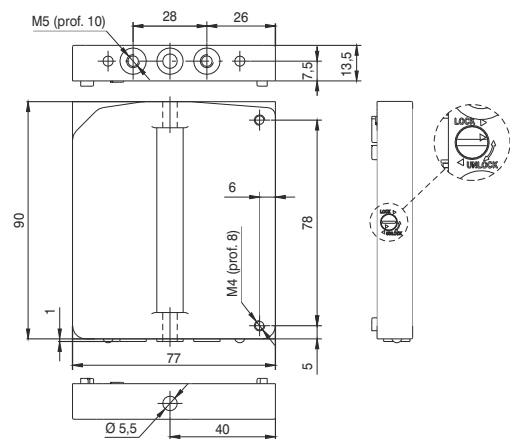



1/11-12/14 Conduit (tube ø10): Main Solenoid valve and pilot feeding (pressure from 2,5bar to 7 bar)
 3/5 Conduit (G 3/8\"): Main Solenoid valve exhaust
 82/84 Conduit (tube ø6): Pilot exhaust

Operational characteristic	Fluid	Temperature °C	Working pressure (bar)	Pressure range (bar)	Weight (gr.)
	Filtered air, with or without lubrication	-5 ÷ +50	From vacuum to 10	2,5 to 7	185

Right Endplates closed

Ordering code
2312.00

Weight gr. 100

Intermediate Inlet/Exhaust module

Ordering code


2308.F

FUNCTION

08=Exhaust module

12=Inlet module

20=Inlet-Exhaust module

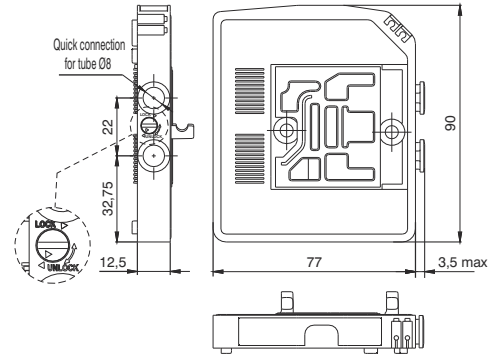

SHORT FUNCTION CODE J
SHORT FUNCTION CODE K
SHORT FUNCTION CODE W

Operational characteristic

Fluid

Filtered air, with or without lubrication

Temperature °C

-5 ÷ +50

Weight (gr.)

90

Through module


Ordering code

2300.F

FUNCTION

01=1 electric signal module

02=2 electric signals module

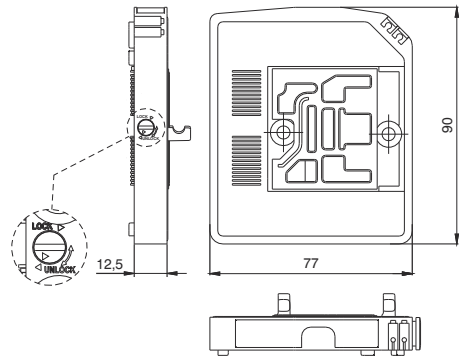

SHORT FUNCTION CODE T1
SHORT FUNCTION CODE T2

Operational characteristic

Fluid

Filtered air, with or without lubrication

Temperature °C

-5 ÷ +50


Weight (gr.)

90

DIN rail adapter

Ordering code

2300.16

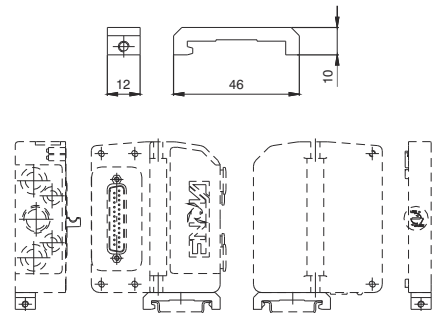


Weight gr. 12

Fixing bracket

Ordering code

2300.50

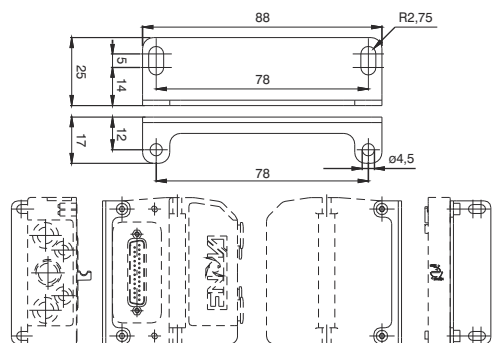

Weight gr. 45
for fixing dimensions see the Left endplates 3 and 5 ports

Exhaust Diaphragm

Ordering code
2317.08



Weight gr. 5
SHORT FUNCTION CODE Y

Inlet Diaphragm

Ordering code
2317.12



Weight gr. 5
SHORT FUNCTION CODE X

Inlet/Exhaust Diaphragm

Ordering code
2317.20



Weight gr. 5
SHORT FUNCTION CODE Z

Cable complete with connector, 25 Poles IP65

Ordering code
2300.25.L.C
CABLE LENGTH
L 03=3 meters
05=5 meters
10=10 meters
CONNECTORS
C 10=In line
90=90° Angle



The electrical connection is achieved via a 25 pin connector and can manage up to 22 solenoid pilots.

The management and distribution of the electrical signals between each valve is obtained thanks to a patented electrical connector which receives the signals from the previous module, uses one, two or none depending on the type, and carries forward to the next module the remaining. Bistable valves, 5/3 ; 2X3/2 e 2X2/2 valves which have two solenoid pilots built in, use two signals; the first is directed to the pilot side 14 the second to the pilot side 12.



Mono-stable valves can be fitted with two type of electrical connector: one that uses only one signal (connected to the pilot side 14) and carries forward the remaining and one called CEB (Electrical contact for bistable) which uses two signals, one is needed for the valve the other is not used.

This second solution (CEB) allows the modification of the manifold (replacement of monostable valves with bistable for example) without the need of reconfiguring the PLC outputs layout. On the other hand this solution limits the maximum number of valves to 11 (two signals for each position).


Intermediate supply / exhaust modules are fitted with a dedicated electrical connector which carries forward all electric signals without using any. This allows the use of intermediate modules in any position of the manifold.

Example of manifold samples with the corresponding pin layout.

2

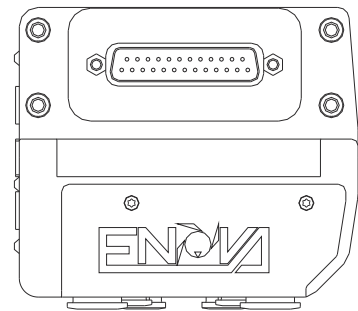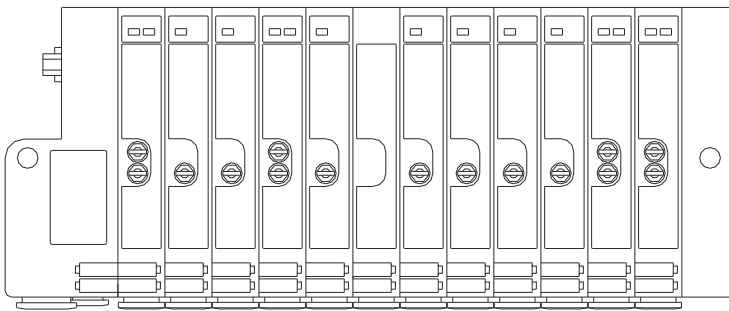


**ELECTRIC CONNECTOR
SUB-D TYPE - 25 POLES**

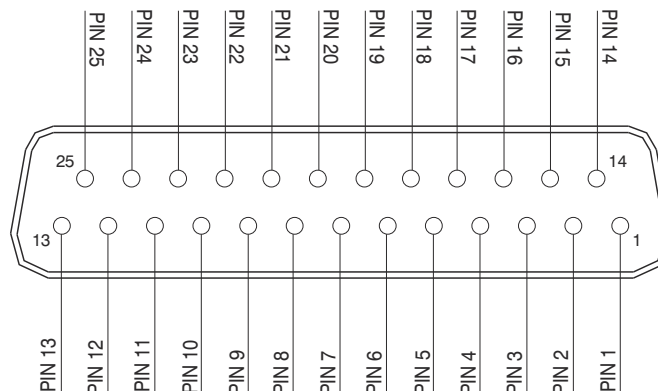


1 - 22 = Solenoid valves signals
23 - 24 - 25 = Common


25 PIN Connector correspondence for bistable, 2x3/2, 5/3 and standard monostable valves manifold

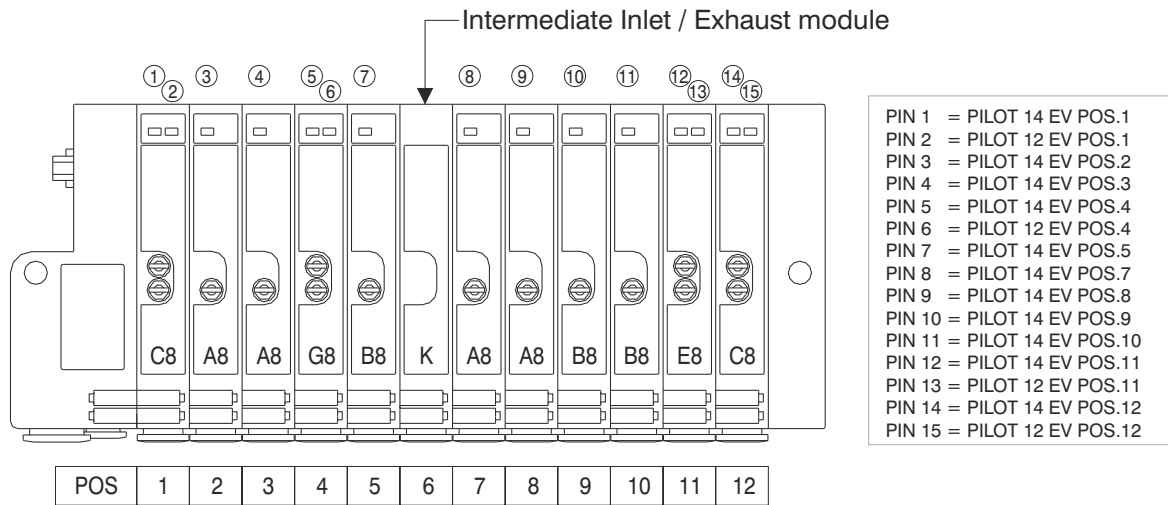


25 PIN Connector correspondence for bistable, 2x3/2, 5/3 manifold and CEB monostable valves (electrical contact for bistable)

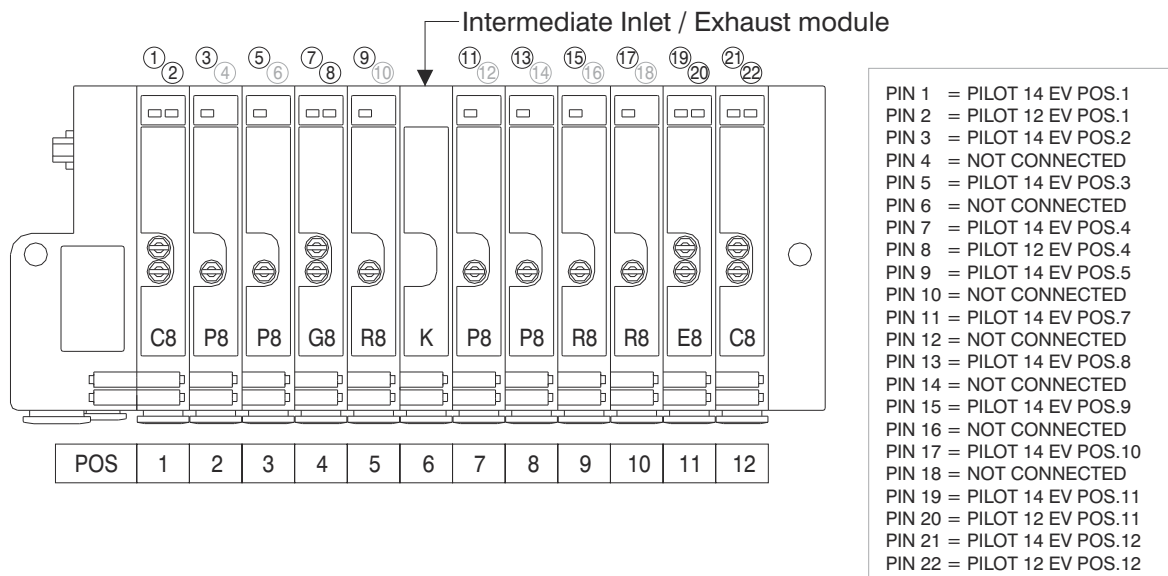


25 PIN Connector correspondence for manifold for 22 position manifold with standard monostable valves

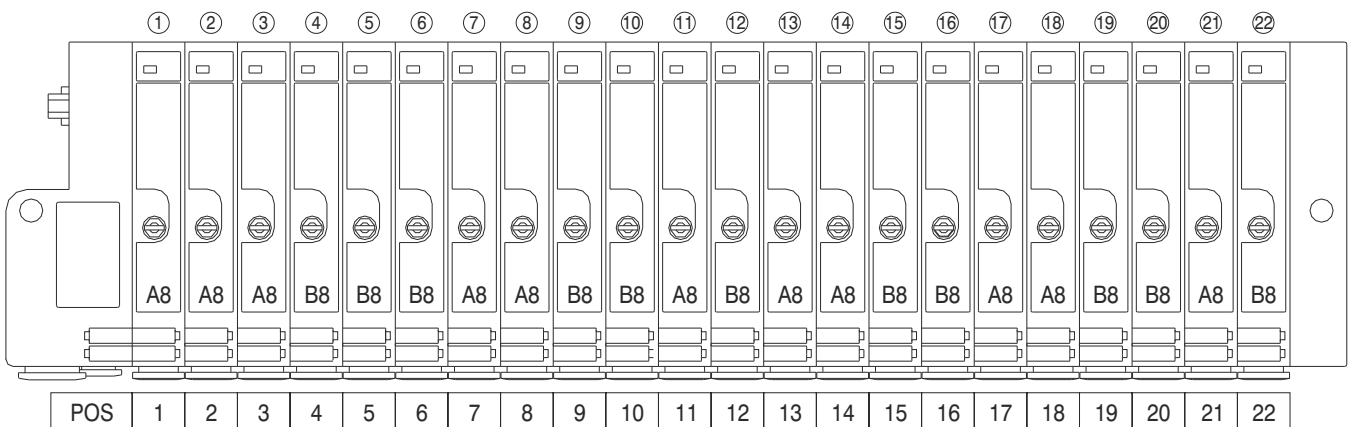


Mounting

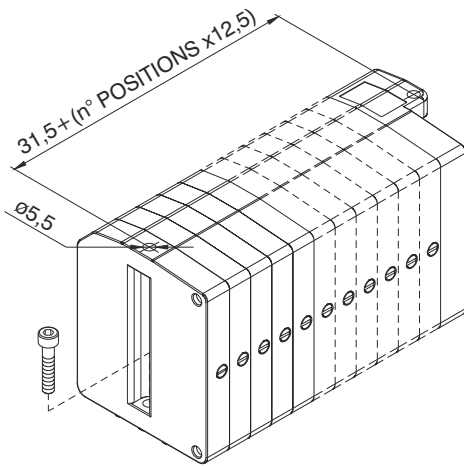


From the top

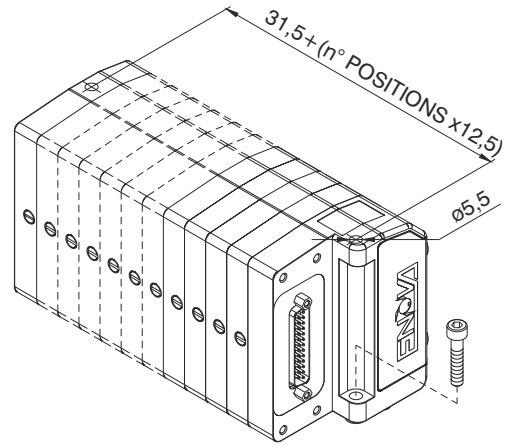


From the bottom

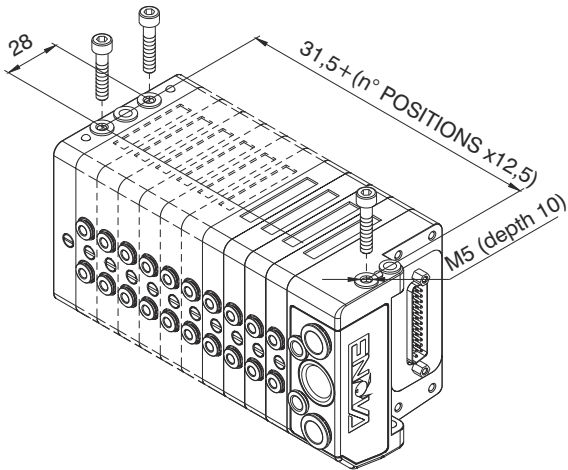


On DIN rail

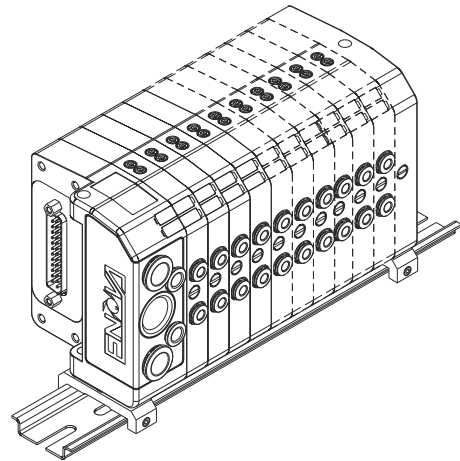

90° Bracket

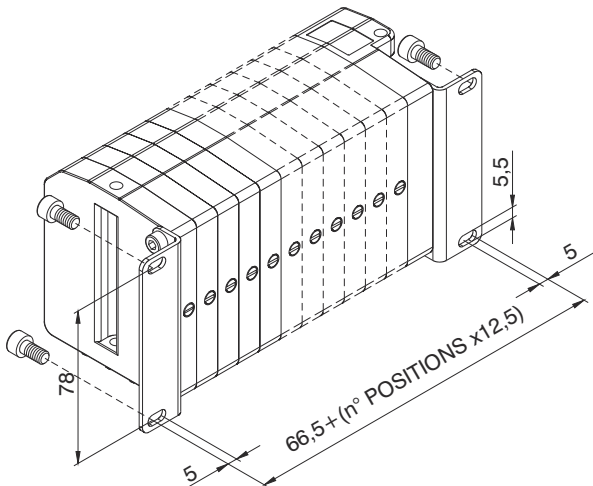



Maximum envelop size based on the number of positions

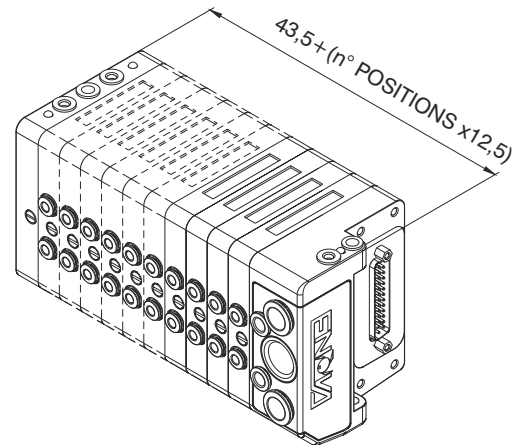

PILOT STATE IDENTIFICATION LED
(LED "ON" IDENTIFIES ACTUATED PILOT)


VALVE MANUAL OVER-RIDE

VALVE COUPLING SCREW

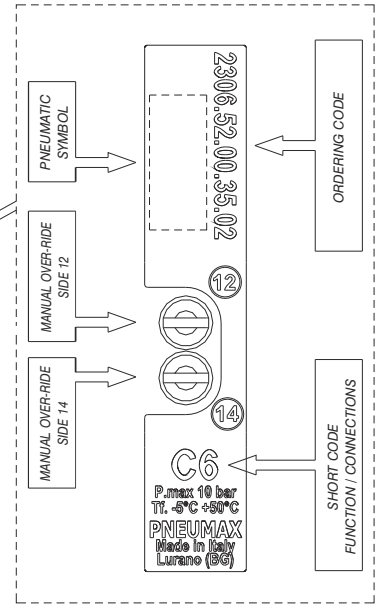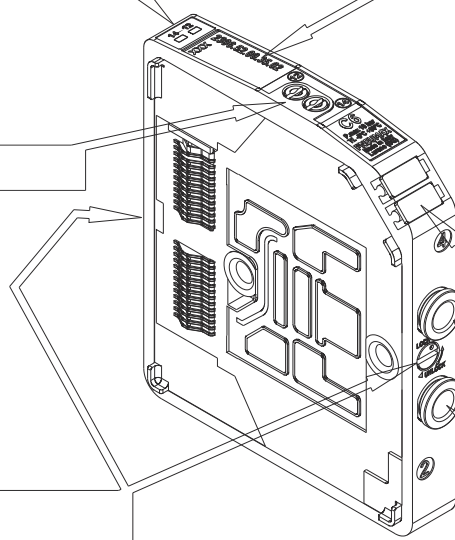



REMOVABLE LABELS
EDITABLE BY THE CLIENTS

VALVE OUTLET
(PORTS 2 & 4)


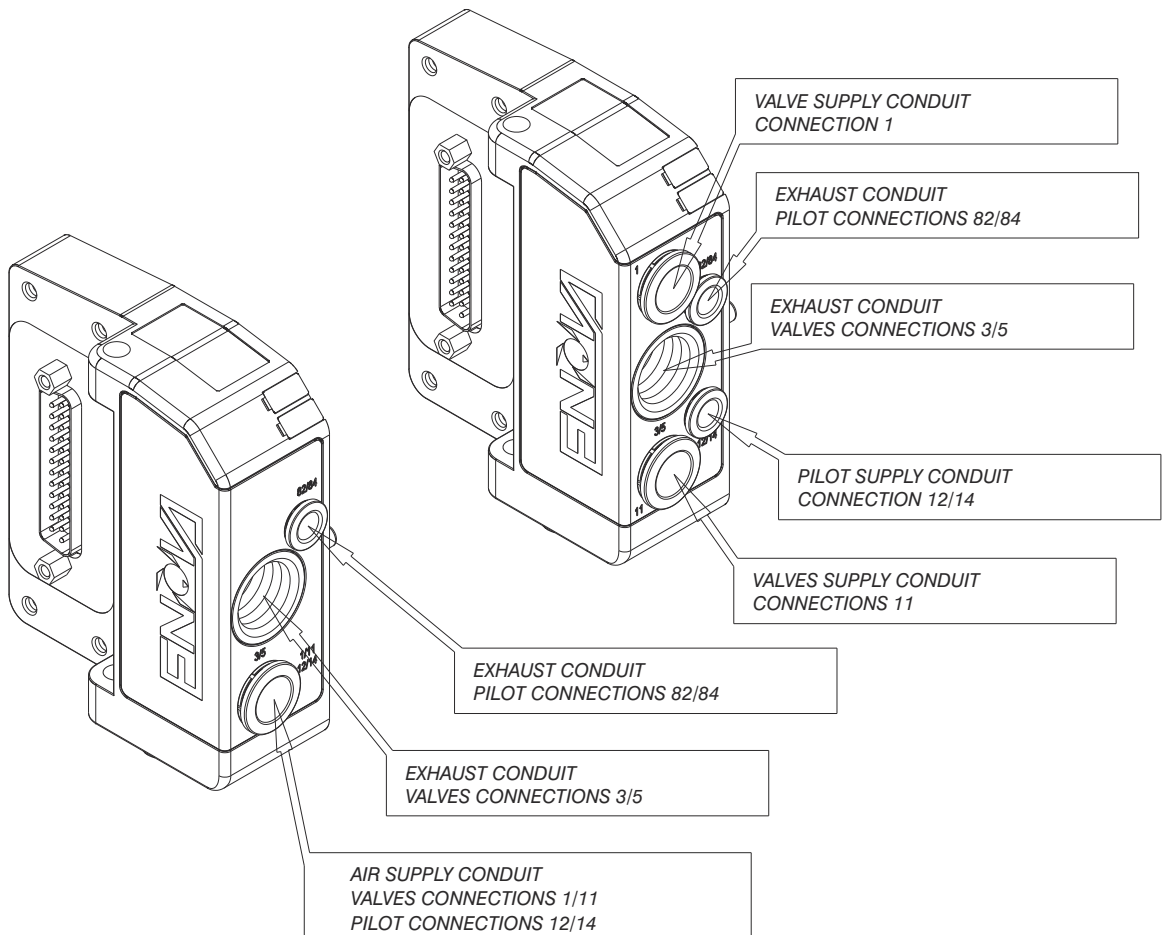


Manual over-ride function

Unstable function

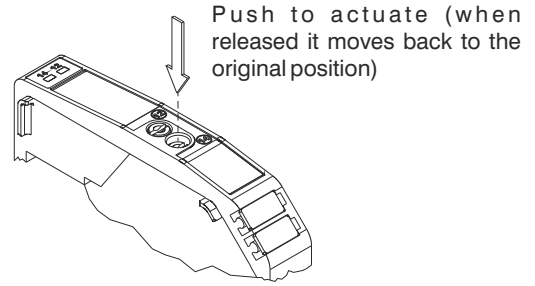

Bistable function

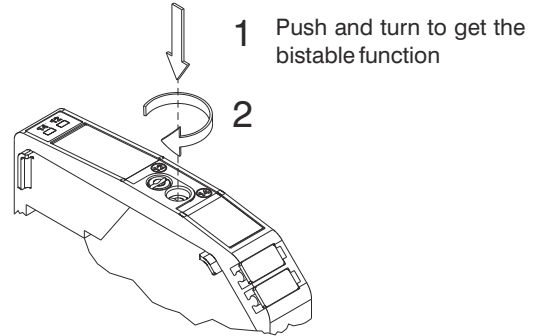

NOTE: It is strongly suggested to replace the original position after using


Manifold assembly

The assembly procedure should start from the end-plate which should be positioned on a flat surface. Add the requested modules by simply rotating by 180° the fastening pins by means of a 1x5.5 flat screw driver. The last module to be assembled shall be the inlet module

Fastening pins rotation direction:

- To lock: rotate anticlockwise (in the direction of the LOCK print on the case)
- To unlock: rotate clockwise (in the direction of the UNLOCK print on the case)

The same procedure shall be used to add or remove any module.

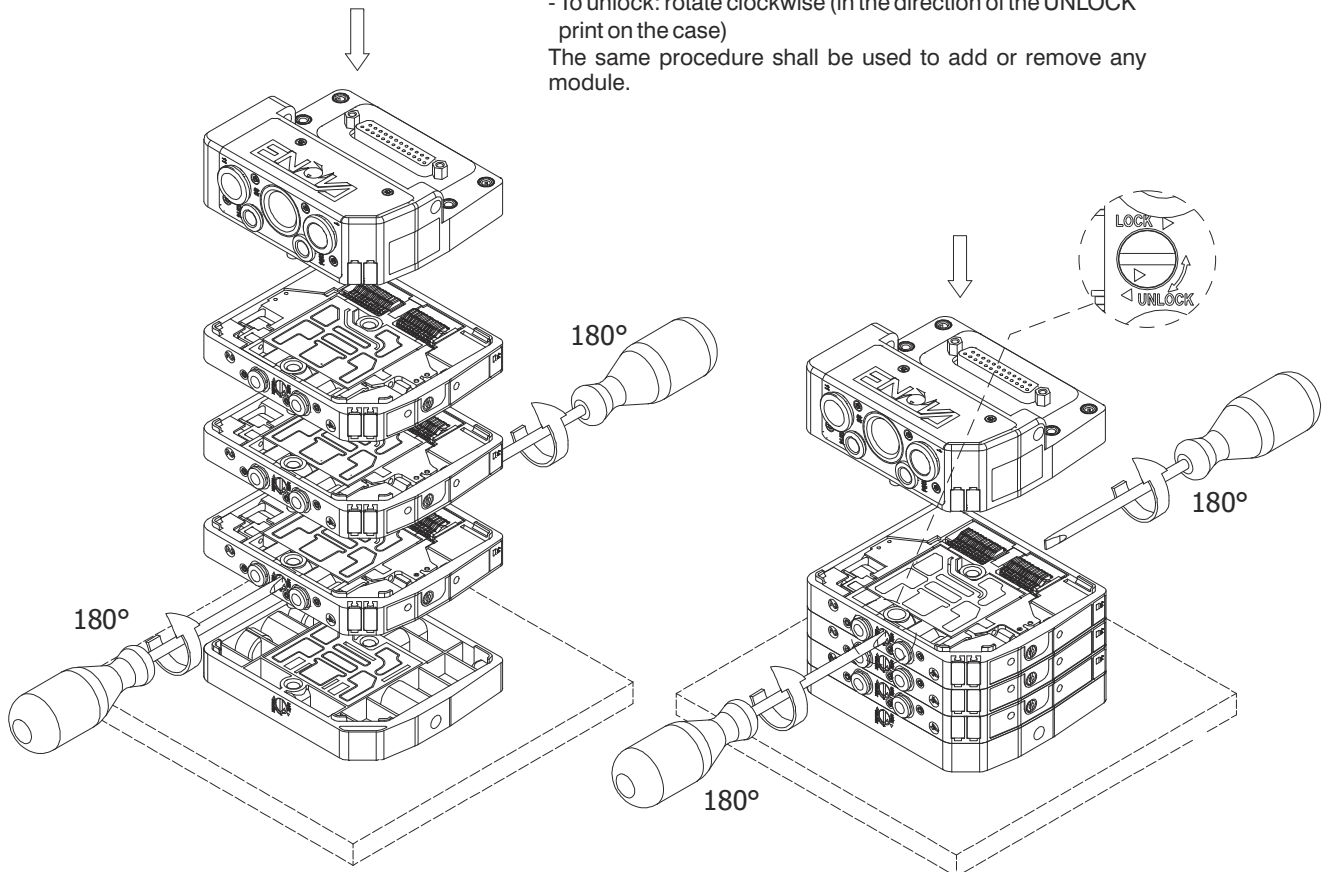

Manifold Lay-Out configuration

**ACCESSORIES :**

0= none
 D= DIN bar adapter
 S= 90° Fixing bracket

ENDPLATES SELECTION :

A= 5 ports endplated left side
 plus right side endplated
 B= 3 ports endplated left side
 plus right side endplated

ELECTRICAL CONNECTION:

MP= MULTIPOLAR PNP (standard)
 MN= MULTIPOLAR NPN
 CA= CANopen® 22 OUT
 CB= CANopen® 22 OUT + 8 IN
 CC= CANopen® 22 OUT + 16 IN
 CD= CANopen® 22 OUT + 24 IN
 DA= DeviceNet 22 OUT
 DB= DeviceNet OUT + 8 IN
 DC= DeviceNet 22 OUT + 16 IN
 DD= DeviceNet OUT + 24 IN
 PA= PROFIBUS 22 OUT
 PB= PROFIBUS 22 OUT + 8 IN
 PC= PROFIBUS 16 OUT + 16 IN

SHORT CODE**FUNCTION / CONNECTION:**

A4= EV 5/2 MONOST. SOL.-SPRING Ø4
 A6= EV 5/2 MONOST. SOL.-SPRING Ø6
 A8= EV 5/2 MONOST. SOL.-SPRING Ø8
 B4= EV 5/2 MONOST. SOL.-DIFFERENTIAL Ø4
 B6= EV 5/2 MONOST. SOL.-DIFFERENTIAL Ø6
 B8= EV 5/2 MONOST. SOL.-DIFFERENTIAL Ø8
 C4= EV 5/2 BISTABLE SOL.-SOL. Ø4
 C6= EV 5/2 BISTABLE SOL.-SOL. Ø6
 C8= EV 5/2 BISTABLE SOL.-SOL. Ø8
 E4= EV 5/3 CC SOL.-SOL. Ø4
 E6= EV 5/3 CC SOL.-SOL. Ø6
 E8= EV 5/3 CC SOL.-SOL. Ø8
 F4= EV 2x3/2 NC-NC (= 5/3 CA) SOL.-SOL. Ø4
 F6= EV 2x3/2 NC-NC (= 5/3 CA) SOL.-SOL. Ø6
 F8= EV 2x3/2 NC-NC (= 5/3 CA) SOL.-SOL. Ø8
 G4= EV 2x3/2 NO-NO (= 5/3 CP) SOL.-SOL. Ø4
 G6= EV 2x3/2 NO-NO (= 5/3 CP) SOL.-SOL. Ø6
 G8= EV 2x3/2 NO-NO (= 5/3 CP) SOL.-SOL. Ø8
 H4= EV 2x3/2 NC-NO SOL.-SOL. Ø4
 H6= EV 2x3/2 NC-NO SOL.-SOL. Ø6
 H8= EV 2x3/2 NC-NO SOL.-SOL. Ø8
 L4= EV 2x2/2 NC-NC SOL.-SOL. Ø4
 L6= EV 2x2/2 NC-NC SOL.-SOL. Ø6
 L8= EV 2x2/2 NC-NC SOL.-SOL. Ø8
 M4= EV 2x2/2 NO-NO SOL.-SOL. Ø4
 M6= EV 2x2/2 NO-NO SOL.-SOL. Ø6
 M8= EV 2x2/2 NO-NO SOL.-SOL. Ø8
 N4= EV 2x2/2 NC-NO SOL.-SOL. Ø4
 N6= EV 2x2/2 NC-NO SOL.-SOL. Ø6
 N8= EV 2x2/2 NC-NO SOL.-SOL. Ø8
 P4= EV 5/2 MONOST. SOL.-SPRING CEB Ø4
 P6= EV 5/2 MONOST. SOL.-SPRING CEB Ø6
 P8= EV 5/2 MONOST. SOL.-SPRING CEB Ø8
 R4= EV 5/2 MONOST. SOL.-DIFF. CEB Ø4
 R6= EV 5/2 MONOST. SOL.-DIFF. CEB Ø6
 R8= EV 5/2 MONOST. SOL.-DIFF. CEB Ø8
 T1 = 1 ELECTRIC SIGNAL THROUGH MODULE
 T2 = 2 ELECTRIC SIGNALS THROUGH MODULE

J= INTERMEDIATE EXHAUST MODULE Ø8
 K= INTERMEDIATE INLET MODULE Ø8
 W = INLET-EXHAUST MODULE Ø8

X= INLET DIAPHRAGM
 Y= EXHAUST DIAPHRAGM
 Z= INLET -EXHAUST DIAPHRAGM

NOTE:

While configuring the manifold always bear in mind that the maximum number of electrical signals available is 22.

N.B. CEB = Electrical connector for bistable valves (uses two electric signals)

Intermediate supply / exhaust modules require the same space as a valve but do not use any electric signals (as the electric connector carries forward all signals received from the module immediately before).

The separation diaphragms are positioned between two modules and replace the standard seal therefore do not increase the dimension of the assembly. When using a separation diaphragm of any type, it is necessary to add, in any position between diaphragm and the manifold and plate, an extra air supply / exhaust module depending on the type of diaphragm used.

General:


CANopen® module is directly integrated on Enova solenoid valves manifold via a 25 poles connector, normally used for multipolar cable connection.
 Enova solenoid valves connected to node must be PNP equivalent (final 02 in ordering code).
 The node can be easily installed also on solenoid valves manifold already mounted on equipment.
 Module can manage up to 22 solenoid valves, and, in the same time, a max number of 3 Input modules 5200.08.
 CANopen® module recognizes automatically the presence of the Input modules on power on.
 Regardless of the number of Input modules connected, the manageable solenoid valves are 22.
 Node power supply is made by a M12 4P male circular connector.
 The separation between node 24 VDC Power supply and outputs 24 VDC allows to switch off the outputs maintaining powered the node and inputs, if present.
 Connection to Bus CANopen® is possible via 2 M12 5P male - female circular connectors; these two are connected in parallel and according to CiA Draft Standard Proposal 301 V 4.10 (15 August 2006).
 Transmission speed can be set by 3 dip-switches.
 The node address can be set by 6 dip-switches using BCD numeration.
 The module includes an internal terminating resistance that can be activated by a dip-switch.

Ordering code

5523.22



Scheme / Overall dimensions and I/O layout :

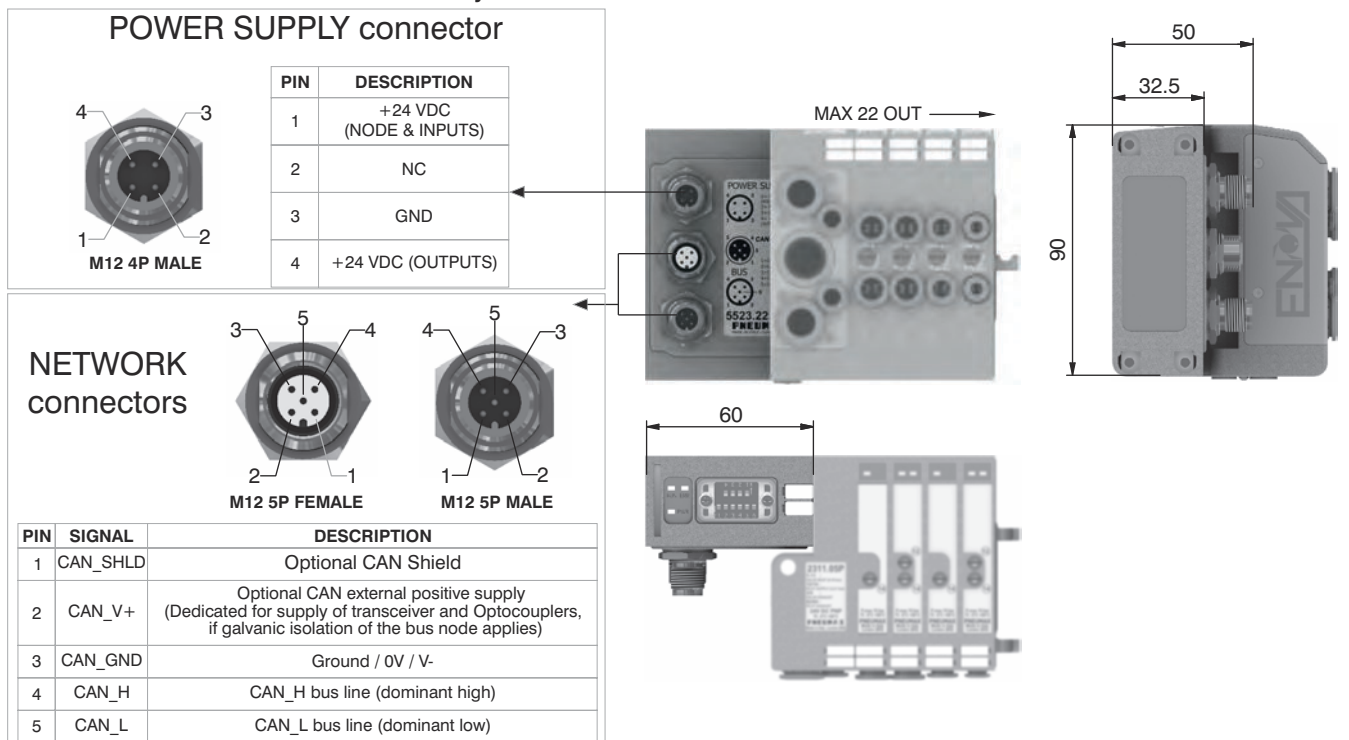

Technical characteristics

Power supply	Model	5523.22	
	Specifications	CiA Draft Standard Proposal 301 V 4.10 (15 August 2006)	
	Case	Reinforced technopolymer	
	Power supply connection	M12 4P male connector (IEC 60947-5-2)	
	Power supply voltage	+24 VDC +/- 10%	
	Node consumption (without inputs)	25 mA	
	Power supply diagnosis	Green led PWR	
	Outputs	PNP equivalent outputs	+24 VDC +/- 10%
		Maximum current for output	100 mA
		Maximum output number	22
		Max output simultaneously actuated	22
	Network	Network connectors	2 M12 5P connectors male-female (IEC 60947-5-2)
		Baud rate	10 - 20 - 50 - 125 - 250 - 500 - 800 - 1000 Kbit/s
		Addresses, possible numbers	From 1 to 63
		Max nodes in net	64 (slave + master)
Bus maximum recommended length		100 m a 500 Kbit/s	
Bus diagnosis		Green led + Red led	
Configuration file		Available from our web site: http://www.pneumaxspa.com	
IP protection grade		IP65 when assembled	
Temperature range		From -0° to +50° C	

General:

DeviceNet module is directly integrated on Enova solenoid valves manifold via a 25 poles connector, normally used for multipolar cable connection.
 Enova solenoid valves connected to node must be PNP equivalent (final 02 in ordering code).
 The node can be easily installed also on solenoid valves manifold already mounted on equipment.
 Module can manage up to 22 solenoid valves, and, in the same time, a max number of 3 Input modules 5200.08.
 DeviceNet module recognizes automatically the presence of the Input modules on power on.
 Regardless of the number of Input modules connected, the managable solenoid valves are 22.
 Node power supply is made by a M12 4P male circular connector.
 The separation between node 24 VDC Power supply and outputs 24 VDC allows to switch off the outputs maintaining powered the node and inputs, if present.
 Connection to Bus DeviceNet is possible via 2 M12 5P male - female circular connectors; these two are connected in parallel and according to DeviceNet Specifications Volume I, release 2.0.
 Transmission speed can be set by 3 dip-switches.
 The node address can be set by 6 dip-switches using BCD numeration.
 The module includes an internal terminating resistance that can be activated by a dip-switch.

Ordering code

5423.22



Scheme / Overall dimensions and I/O layout :

POWER SUPPLY connector

PIN	DESCRIPTION
1	+24 VDC (NODE & INPUTS)
2	NC
3	GND
4	+24 VDC (OUTPUTS)

NETWORK connectors

PIN	SIGNAL	DESCRIPTION
1	CAN_SHLD	Optional CAN Shield
2	CAN_V+	Optional CAN external positive supply (Dedicated for supply of transceiver and Optocouplers, if galvanic isolation of the bus node applies)
3	CAN_GND	Ground / 0V / V-
4	CAN_H	CAN_H bus line (dominant high)
5	CAN_L	CAN_L bus line (dominant low)

Technical characteristics

	Model	5423.22
	Specifications	DeviceNet Specifications Volume I, release 2.0.
	Case	Reinforced technopolymer
Power supply	Power supply connection	M12 4P male connector (IEC 60947-5-2)
	Power supply voltage	+24 VDC +/- 10%
	Node consumption (without inputs)	25 mA
	Power supply diagnosis	Green led PWR
Outputs	PNP equivalent outputs	+24 VDC +/- 10%
	Maximum current for output	100 mA
	Maximum output number	22
	Max output simultaneously actuated	22
Network	Network connectors	2 M12 5P connectors male-female (IEC 60947-5-2)
	Baud rate	125 - 250 - 500 Kbit/s
	Addresses, possible numbers	From 1 to 63
	Max nodes in net	64 (slave + master)
	Bus maximum recommended length	100 m a 500 Kbit/s
	Bus diagnosis	Green led + Red led
	Configuration file	Available from our web site: http://www.pneumaxspa.com
	IP protection grade	IP65 when assembled
	Temperature range	From -0° to +50° C

General:

PROFIBUS DP module is directly integrated on Enova solenoid valves manifold via a 25 poles connector, normally used for multipolar cable connection.
 Enova solenoid valves connected to node must be PNP equivalent (final 02 in ordering code).
 The node can be easily installed also on solenoid valves manifold already mounted on equipment.
 Module can manage up to 22 solenoid valves, when is connected 0 or 1 INPUT modules, or 16 if node is fitted with 2 INPUT modules. The max number of INPUT modules 5200.08, is 2.
 PROFIBUS DP module recognizes automatically the presence of the Input modules on power on.
 Node power supply is made by a M12 4P male circular connector.
 The separation between node 24 VDC Power supply and outputs 24 VDC allows to switch off the outputs maintaining powered the node and inputs, if present.
 Connection to Bus PROFIBUS DP is possible via 2 M12 type B 5P male - female circular connectors; these two are connected in parallel and according to PROFIBUS Interconnection Technology (Version 1.1 : August 2001).
 The node address can be set using BCD numeration: 4 dip-switches for the units and 4 dip-switches for the tens.
 The module includes an internal terminating resistance that can be activated by a dip-switch.


Ordering code

5323.22






Scheme / Overall dimensions and I/O layout :

POWER SUPPLY connector



PIN	DESCRIPTION
1	+24 VDC (NODE & INPUTS)
2	NC
3	GND
4	+24 VDC (OUTPUTS)

NETWORK connectors

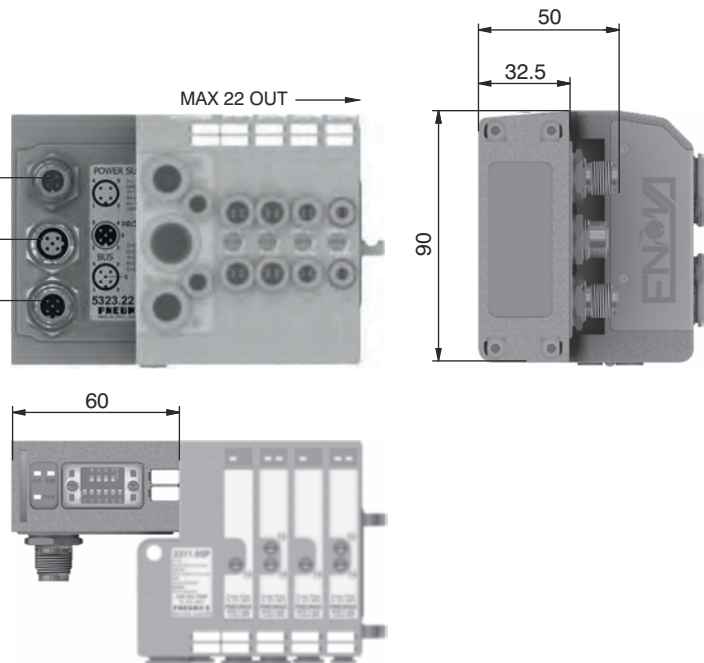

PIN	SIGNAL	DESCRIPTION
1	VP	Power supply plus, (P5V)
2	A-line	Receive / Transmit data -N, A-line
3	DGND	Data Ground (reference potential to VP)
4	B-line	Receive / Transmit data -plus, B-line
5	SHIELD	Shield or PE

Technical characteristics

	Model	5323.22
	Specifications	PROFIBUS DP
	Case	Reinforced technopolymer
Power supply	Power supply connection	M12 4P male connector (IEC 60947-5-2)
	Power supply voltage	+24 VDC +/- 10%
	Node consumption (without inputs)	50 mA
	Power supply diagnosis	Green led PWR
Outputs	PNP equivalent outputs	+24 VDC +/- 10%
	Maximum current for output	100 mA
	Maximum output number	22 or 16 if node is fitted with 2 INPUT modules
	Max output simultaneously actuated	22
Network	Network connectors	2 M12 5P connectors male-female (IEC 60947-5-2)
	Baud rate	125 - 250 - 500 Kbit/s
	Addresses, possible numbers	From 1 to 63
	Max nodes in net	64 (slave + master)
	Bus maximum recommended length	100 m a 500 Kbit/s
	Bus diagnosis	Green led + Red led
	Configuration file	Available from our web site: http://www.pneumaxspa.com
	IP protection grade	IP65 when assembled
	Temperature range	From -0° to +50° C

General:

Modules have 8 connectors M8 3P female.

The Inputs are PNP equivalent 24 VDC $\pm 10\%$.

To each connector it is possible to plug both 2 wires Inputs (switches, magnetic switches pressure switches, etc) or 3 wires Inputs (proximity, photocells, electronic sensors, etc).

The maximum current available for all 8 Inputs is 200 mA.

Each module includes a 200 mA resettable fuse. If a short circuit or a overcharge (overall current >200mA) occur the safety device acts cutting the 24 VDC power supply to all M8 connectors on the module and switching off the green led PWR. Any other Input module connected to the node will remain powered and will function correctly.

Once the cause of the fault disappears the green led PWR light up indicating the ON state and the node will re-start to operate.






The Maximum number of Input modules supported is 3 for CANopen and DeviceNet, 2 for PROFIBUS DP.

Ordering code


5200.08




Scheme / Overall dimensions and I/O layout :

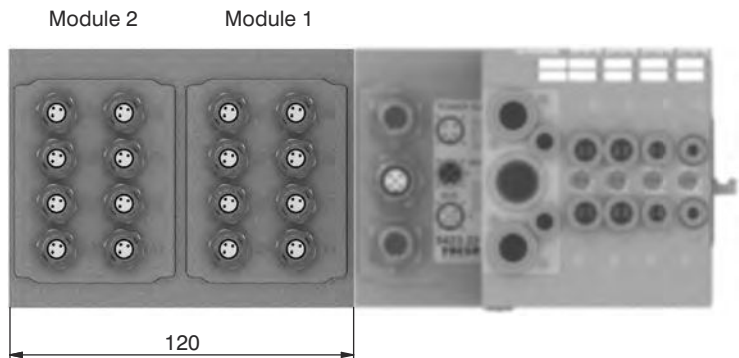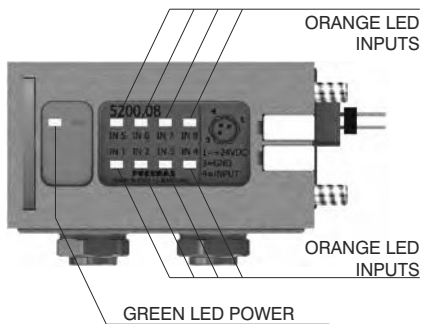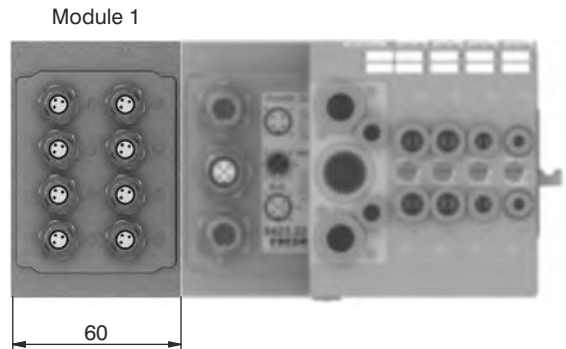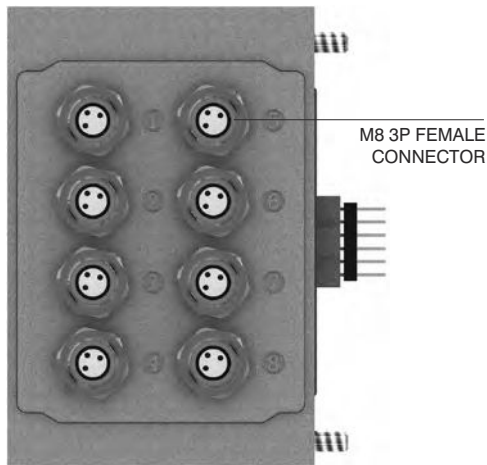

PIN	DESCRIPTION
1	+24 VDC
4	INPUT
3	GND

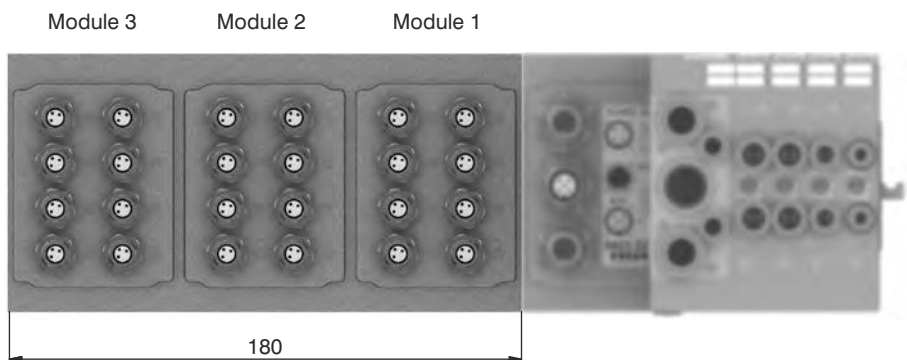

Manifold layout configuration complete with Serial systems

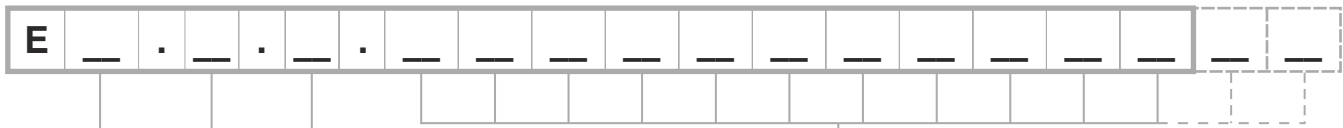

2

ACCESSORIES :
 0= none
 D= DIN bar adapter
 S= 90° Fixing bracket

ENDPLATES SELECTION :
 A= 5 ports endplated left side plus right side endplated
 B= 3 ports endplated left side plus right side endplated




BUS CONFIGURATION :
 CA= CANopen® 22 OUT
 CB= CANopen® 22 OUT + 8 INPUTS
 CC= CANopen® 22 OUT + 16 INPUTS
 CD= CANopen® 22 OUT + 24 INPUTS
 DA= DeviceNet 22 OUT
 DB= DeviceNet 22 OUT + 8 INPUTS
 DC= DeviceNet 22 OUT + 16 INPUTS
 DD= DeviceNet 22 OUT + 24 INPUTS
 PA= PROFIBUS 22 OUT
 PB= PROFIBUS 22 OUT + 8 INPUTS
 PC= PROFIBUS 16 OUT + 16 INPUTS





SHORT CODE
FUNCTION / CONNECTION:
 A4= EV 5/2 MONOST. SOL.-SPRING Ø4
 A6= EV 5/2 MONOST. SOL.-SPRING Ø6
 A8= EV 5/2 MONOST. SOL.-SPRING Ø8
 B4= EV 5/2 MONOST. SOL.-DIFFERENTIAL Ø4
 B6= EV 5/2 MONOST. SOL.-DIFFERENTIAL Ø6
 B8= EV 5/2 MONOST. SOL.-DIFFERENTIAL Ø8
 C4= EV 5/2 BISTABLE SOL.-SOL. Ø4
 C6= EV 5/2 BISTABLE SOL.-SOL. Ø6
 C8= EV 5/2 BISTABLE SOL.-SOL. Ø8
 E4= EV 5/3 CC SOL.-SOL. Ø4
 E6= EV 5/3 CC SOL.-SOL. Ø6
 E8= EV 5/3 CC SOL.-SOL. Ø8
 F4= EV 2x3/2 NC-NC (= 5/3 CA) SOL.-SOL. Ø4
 F6= EV 2x3/2 NC-NC (= 5/3 CA) SOL.-SOL. Ø6
 F8= EV 2x3/2 NC-NC (= 5/3 CA) SOL.-SOL. Ø8
 G4= EV 2x3/2 NO-NO (= 5/3 CP) SOL.-SOL. Ø4
 G6= EV 2x3/2 NO-NO (= 5/3 CP) SOL.-SOL. Ø6
 G8= EV 2x3/2 NO-NO (= 5/3 CP) SOL.-SOL. Ø8
 H4= EV 2x3/2 NC-NO SOL.-SOL. Ø4
 H6= EV 2x3/2 NC-NO SOL.-SOL. Ø6
 H8= EV 2x3/2 NC-NO SOL.-SOL. Ø8
 L4= EV 2x2/2 NC-NC SOL.-SOL. Ø4
 L6= EV 2x2/2 NC-NC SOL.-SOL. Ø6
 L8= EV 2x2/2 NC-NC SOL.-SOL. Ø8
 M4= EV 2x2/2 NO-NO SOL.-SOL. Ø4
 M6= EV 2x2/2 NO-NO SOL.-SOL. Ø6
 M8= EV 2x2/2 NO-NO SOL.-SOL. Ø8
 N4= EV 2x2/2 NC-NO SOL.-SOL. Ø4
 N6= EV 2x2/2 NC-NO SOL.-SOL. Ø6
 N8= EV 2x2/2 NC-NO SOL.-SOL. Ø8
 P4= EV 5/2 MONOST. SOL.-SPRING CEB Ø4
 P6= EV 5/2 MONOST. SOL.-SPRING CEB Ø6
 P8= EV 5/2 MONOST. SOL.-SPRING CEB Ø8
 R4= EV 5/2 MONOST. SOL.-DIFF. CEB Ø4
 R6= EV 5/2 MONOST. SOL.-DIFF. CEB Ø6
 R8= EV 5/2 MONOST. SOL.-DIFF. CEB Ø8
 T1 = 1 ELECTRIC SIGNAL THROUGH MODULE
 T2 = 2 ELECTRIC SIGNALS THROUGH MODULE





 J= INTERMEDIATE EXHAUST MODULE Ø8
 K= INTERMEDIATE INLET MODULE Ø8
 W = INLET-EXHAUST MODULE Ø8



 X= INLET DIAPHRAGM
 Y= EXHAUST DIAPHRAGM
 Z= INLET -EXHAUST DIAPHRAGM

NOTE:
 While configuring the manifold always bear in mind that the maximum number of electrical signals available is 22.
N.B. CEB = Electrical connector for bistable valves (uses two electric signals)
 Intermediate supply / exhaust modules require the same space as a valve but do not use any electric signals (as the electric connector carries forward all signals received from the module immediately before).
 The separation diaphragms are positioned between two modules and replace the standard seal therefore do not increase the dimension of the assembly. When using a separation diaphragm of any type, it is necessary to add, in any position between diaphragm and the manifold and plate, an extra air supply / exhaust module depending on the type of diaphragm used.

Socket for Power supply, M12A 4P Female		Plug for Input module, M8 3P Male															
Ordering code		Ordering code															
5312A.F04.00		5308A.M03.00															
Power supply straight connector Upper view slave connector		Input straight connector Upper view slave connector															
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td>1</td><td>+24 VDC (Node & Inputs)</td></tr> <tr><td>2</td><td></td></tr> <tr><td>3</td><td>0 V</td></tr> <tr><td>4</td><td>+24 VDC (Outputs)</td></tr> </table>	1	+24 VDC (Node & Inputs)	2		3	0 V	4	+24 VDC (Outputs)		<table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td>1</td><td>+24 VDC</td></tr> <tr><td>4</td><td>INPUT</td></tr> <tr><td>3</td><td>GND</td></tr> </table>	1	+24 VDC	4	INPUT	3	GND
1	+24 VDC (Node & Inputs)																
2																	
3	0 V																
4	+24 VDC (Outputs)																
1	+24 VDC																
4	INPUT																
3	GND																

Socket for BUS CANOpen, DeviceNet, M12A 5P Female		Plug for BUS CANOpen, DeviceNet, M12A 5P Male																					
Ordering code		Ordering code																					
5312A.F05.00		5312A.M05.00																					
Network straight connector Upper view slave connector		Network straight connector Upper view slave connector																					
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td>1</td><td>(CAN_SHIELD)</td></tr> <tr><td>2</td><td>(CAN_V+)</td></tr> <tr><td>3</td><td>CAN_GND</td></tr> <tr><td>4</td><td>CAN_H</td></tr> <tr><td>5</td><td>CAN_L</td></tr> </table>	1	(CAN_SHIELD)	2	(CAN_V+)	3	CAN_GND	4	CAN_H	5	CAN_L		<table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td>1</td><td>(CAN_SHIELD)</td></tr> <tr><td>2</td><td>(CAN_V+)</td></tr> <tr><td>3</td><td>CAN_GND</td></tr> <tr><td>4</td><td>CAN_H</td></tr> <tr><td>5</td><td>CAN_L</td></tr> </table>	1	(CAN_SHIELD)	2	(CAN_V+)	3	CAN_GND	4	CAN_H	5	CAN_L
1	(CAN_SHIELD)																						
2	(CAN_V+)																						
3	CAN_GND																						
4	CAN_H																						
5	CAN_L																						
1	(CAN_SHIELD)																						
2	(CAN_V+)																						
3	CAN_GND																						
4	CAN_H																						
5	CAN_L																						

Socket for BUS PROFIBUS DP, M12B 5P Female		Plug for BUS PROFIBUS DP, M12B 5P Male																					
Ordering code		Ordering code																					
5312B.F05.00		5312B.M05.00																					
Network straight connector Upper view slave connector		Network straight connector Upper view slave connector																					
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td>1</td><td>Power Supply</td></tr> <tr><td>2</td><td>A-line</td></tr> <tr><td>3</td><td>DGND</td></tr> <tr><td>4</td><td>B-line</td></tr> <tr><td>5</td><td>SHIELD</td></tr> </table>	1	Power Supply	2	A-line	3	DGND	4	B-line	5	SHIELD		<table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td>1</td><td>Power Supply</td></tr> <tr><td>2</td><td>A-line</td></tr> <tr><td>3</td><td>DGND</td></tr> <tr><td>4</td><td>B-line</td></tr> <tr><td>5</td><td>SHIELD</td></tr> </table>	1	Power Supply	2	A-line	3	DGND	4	B-line	5	SHIELD
1	Power Supply																						
2	A-line																						
3	DGND																						
4	B-line																						
5	SHIELD																						
1	Power Supply																						
2	A-line																						
3	DGND																						
4	B-line																						
5	SHIELD																						

M12 Plug		M8 Plug	
Ordering code		Ordering code	
5300.T12		5300.T08	

Trademarks: EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.