
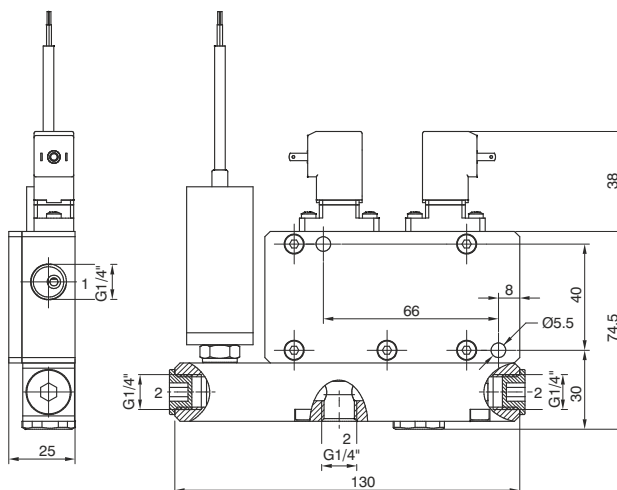


Multifunction vacuum generator

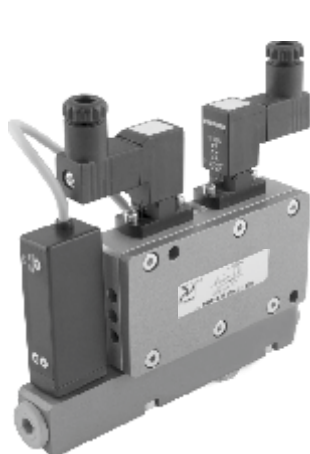


Ordering code

19M14.M.09.SE.⊙






OPTIONS

- ED = Solenoid valve with vacuum switch
- 01 = Solenoid valve without vacuum switch
- ⊙ = Vacuum switch without back pressure valve
- 04 = Without vacuum switch and back pressure valve



Performance characteristics

Supply pressure (bar)	2	4	6
Degree of Vacuum (-kPa)	41	89	87
Intake flow rate (l/min)	26	50	55
Air consumption (l/min)	19	35	47



Performance Charts

Technical features

Fluid	Unlubricated filtered air
Pressure (bar)	0 ÷ 6
Supply and release solenoid valve function	N.C.
Power consumption	4 Watt
Supply voltage	24 VDC
Solenoid valve level of protection	IP65
Vacuum switch output	2 PNP
Vacuum switch level of protection	IP40
Temperature (°C)	-10 ÷ +60
Weight (gr.)	538