



Multistage high flow vacuum generator G3/4"



Ordering code
19T34.M.46.HF.QQ

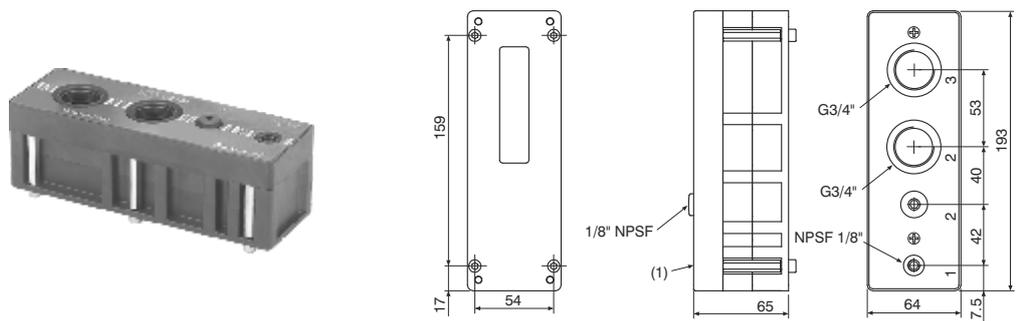

Performance characteristics

- Optimum supply pressure (bar)	3.4
- Supply pressure (bar)	3.4 / 6
- Degree of Vacuum (-kPa)	89 / 92
- Intake flow rate (l/min)	760 / 950
- Air consumption (l/min)	365 / 610

Performance Charts

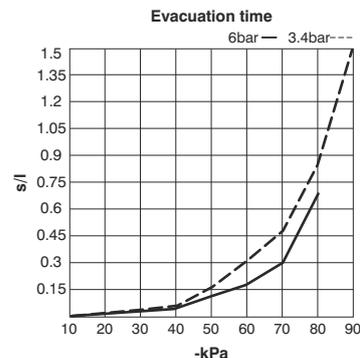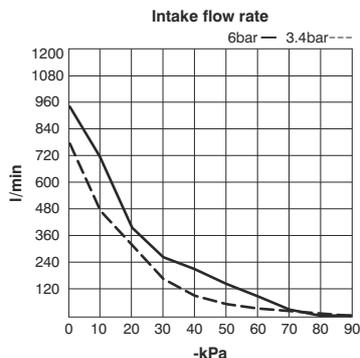

Supply pressure (bar)	Air consumption (l/min)	Intake flow rate (l/min) at different levels of vacuum (-kPa)										Degree of Vacuum max. (-kPa)
		0	10	20	30	40	50	60	70	80	90	
3.4	365	760	445	340	175	110	85	70	43	20	1.8	92
6	610	950	710	380	285	230	170	100	32	11	/	89

Supply pressure (bar)	Air consumption (l/min)	Evacuation time (s/l) at different levels of vacuum (-kPa)									Degree of Vacuum max. (-kPa)
		10	20	30	40	50	60	70	80	90	
3.4	365	0.012	0.029	0.058	0.095	0.18	0.31	0.46	0.89	1.5	92
6	610	0.009	0.019	0.045	0.075	0.13	0.18	0.31	0.70	/	89

Technical features

- Fluid	Unlubricated filtered air
- Max. supply pressure (bar)	7
- Noise (dBA)	60 ÷ 65
- Temperature (°C)	-20 ÷ 80
- Material	PPS, SS, PA, NBR
- Weight (gr.)	837