


Winding
(for Series 771, 772, 773, 779, T772, T773, T771 and N776)



Weight 52 gr.



Standard version

Ordering code	Available voltages
MB 4	12 D.C. Direct current
MB 5	24 D.C. Direct current
MB 6	48 D.C. Direct current
MB 9 *	24 D.C. (2 Watt) (Direct current, low consumption)
MB 17	24/50 alternating current 50 Hz
MB 21	48/50 alternating current 50 Hz
MB 22	110/50 alternating current 50 Hz
MB 24	230/50 alternating current 50 Hz
MB 37	24/60 alternating current 60 Hz
MB 39	110/60 alternating current 60 Hz
MB 41	230/60 alternating current 60 Hz
MB 56	24/50-60 alternating current 50/60 Hz
MB 57	110/50-60 alternating current 50/60 Hz
MB 58	230/50-60 alternating current 50/60 Hz
MB 66 **	24/50-60 alternating current 50/60 Hz
MB 67 **	110/50-60 alternating current 50/60 Hz
MB 68 **	230/50-60 alternating current 50/60 Hz

* Can be used only with mechanism M2/9
** low consumption


US Version

Ordering code	Available voltages
UMB 4	12 D.C. Direct current
UMB 5	24 D.C. Direct current
UMB 56	24/50-60 alternating current 50/60 Hz
UMB 57	110 ÷ 120/50-60 alternating current 50/60 Hz
UMB 58	230/50-60 alternating current 50/60 Hz

Winding
(for Series N776)



Weight 110 gr.



Standard Version

Ordering code	Available voltages
MC 5	24 D.C. Direct current
MC 9	24 D.C. (2 Watt) Direct current
MC 56	24/50-60 alternating current 50/60 Hz
MC 57	110/50-60 alternating current 50/60 Hz
MC 58	230/50-60 alternating current 50/60 Hz


US Version

Ordering code	Available voltages
UMC 5	24 D.C. Direct current
UMC 56	24/50-60 alternating current 50/60 Hz
UMC 57	110 ÷ 120/50-60 alternating current 50/60 Hz
UMC 58	230/50-60 alternating current 50/60 Hz

Solenoid valve
(for Series 776)



Weight 220 gr.

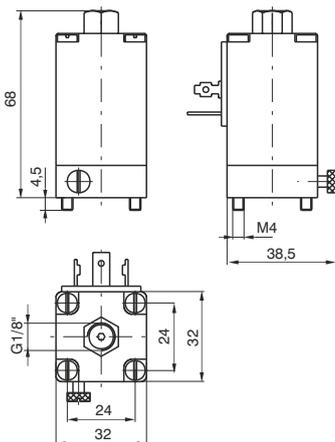

Standard Version

Ordering code	Available voltages
S 2	6 D.C. Direct current
S 4	12 D.C. Direct current
S 5	24 D.C. Direct current
S 6	48 D.C. Direct current
S 16	12/50 alternating current 50 Hz
S 17	24/50 alternating current 50 Hz
S 19	32/50 alternating current 50 Hz
S 20	42/50 alternating current 50 Hz
S 21	48/50 alternating current 50 Hz
S 22	110/50 alternating current 50 Hz
S 23	115/50 alternating current 50 Hz
S 24	230/50 alternating current 50 Hz
S 36	12/60 alternating current 60 Hz
S 37	24/60 alternating current 60 Hz
S 38	48/60 alternating current 60 Hz
S 39	110/60 alternating current 60 Hz
S 40	115/60 alternating current 60 Hz
S 41	230/60 alternating current 60 Hz
S 56	24/50-60 alternating current 50/60 Hz
S 57	110/50-60 alternating current 50/60 Hz
S 58	230/50-60 alternating current 50/60 Hz

US Version

Ordering code	Available voltages
US 4	12 D.C. Direct current
US 5	24 D.C. Direct current
US 56	24/50-60 alternating current 50/60 Hz
US 57	110 ÷ 120/50-60 alternating current 50/60 Hz
US 58	230/50-60 alternating current 50/60 Hz

Normally closed (N.C.)

