

**PRESSURE GAUGES - Art. MGE - STAINLESS STEEL CASE (GLYCERINE) - BOTTOM**

**Model** MGE.R


**Kind of use** Suitable for all process gaseous and liquid that don't attack copper alloy parts. Intended for adverse service conditions where pulsating or vibration exists. Hydraulics, Compressors

**Product description** Pressure gauge made according UNI EN 837.1 norms - Stainless steel case aisi 304 dial IP67 - Dial 80 - 100 - 150 mm. - aisi 304 bayonet ring - Polycarbonated windows - BRASS movement and pivot - BOTTOM cilindrical (ISO 228) connection - Aluminium dial White background - Black BAR scale and Red PSI one (except compoud gauge BAR only) - Accuracy 1,0% - Aluminium index

**Using range** Working Temperature: -10 +65° C (+14 +149° F)  
Working Pressure: Steady 75% - Variable 60%  
Overpressure 15%

**Models** Normalized range: Vacum -1 / 0 Bar+CmHg; Compound -1+0,6; -1+1,5; -1+3; -1+5; -1+9; -1+15 BAR only; 0.6; 1; 1,6; 2,5; 4; 6; 10; 16; 25; 40; 60; 100; 160; 250; 400; 600; 1000 Bar + Psi

**Options** NPT ANSI B.1.20.1 thread, With or without glycerine, OXYGEN SERVICE, customize range, scale or logo; Coloured sector; Bottom connction @ 3 / 9 / 12 hours

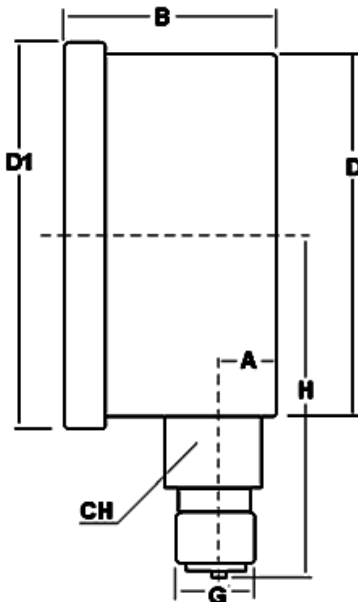

VAR	A	B	D	D1	H	G	CH	Kg	Lotto
dn 80	10	40	79	88	62	1/4" BSPP	14	0,450	-
dn 100	10	38	98,5	110	82	1/2" BSPP	22	0,645	20
dn 150	18	54	149	160	110	1/2" BSPP	22	0,845	-

**NOTE**

The data, measurements and information given in this datasheet may be changed at any time by Bart srl, without prior notice.