


## XNBR

### Installation Recommendations

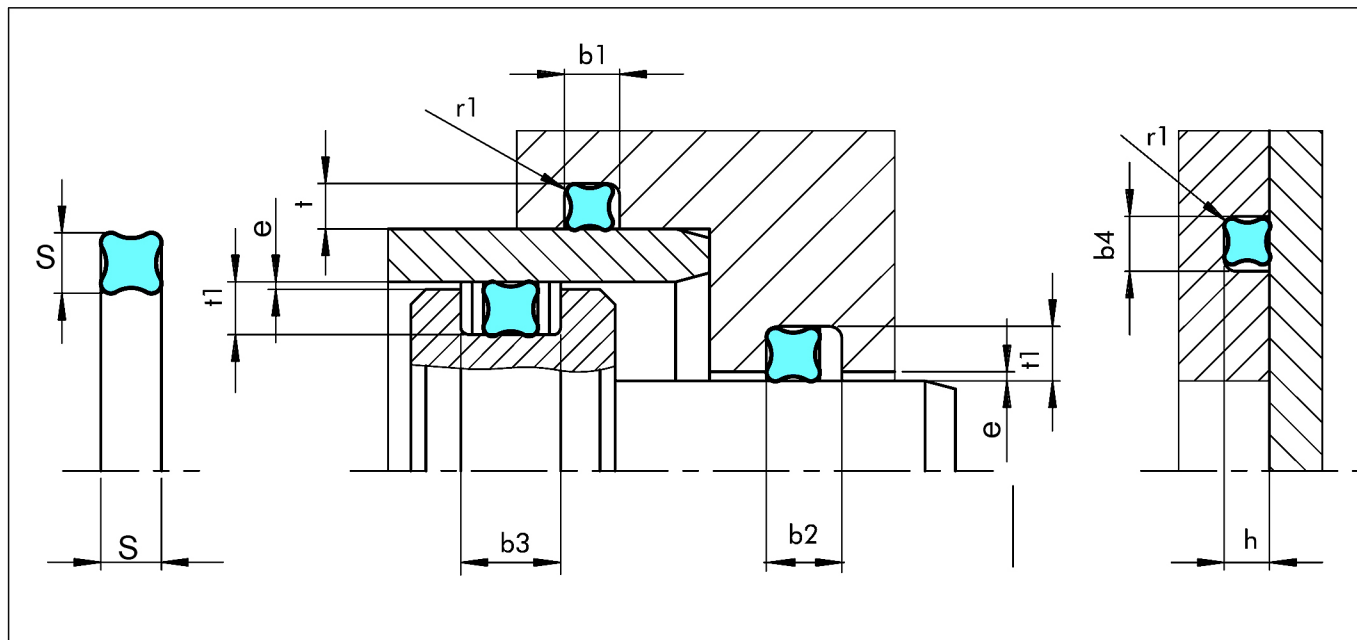

Installation drawing

Table IV Installation Dimensions

Cord Diameter S	Radial Initial Squeeze		Groove Dimensions					Radius <sup>3)</sup> r <sub>1</sub>	Radial Gap e <sub>max.</sub>
	Dynamic max. min.	Static max. min.	Groove Depth <sup>1)</sup>		Groove Width				
			Dynamic t <sub>1</sub> +0.05	Static t/h +0.05	b <sub>1</sub> , b <sub>4</sub> +0.2	b <sub>2</sub> +0.2	b <sub>3</sub> +0.2		
1.02	<u>0.300</u> 0.115	<u>0.350</u> 0.165	0.80	0.75	1.20	2)	2)	0.10	0.03
1.27	<u>0.330</u> 0.145	<u>0.430</u> 0.245	1.00	0.90	1.40			0.10	0.03
1.52	<u>0.350</u> 0.165	<u>0.450</u> 0.265	1.25	1.15	1.70			0.22	0.04
1.78	<u>0.360</u> 0.175	<u>0.460</u> 0.275	1.50	1.40	2.00			0.22	0.05
2.62	<u>0.400</u> 0.215	<u>0.450</u> 0.265	2.30	2.25	3.00			0.30	0.08
3.53	<u>0.430</u> 0.205	<u>0.530</u> 0.305	3.20	3.10	4.00			0.40	0.08
5.33	<u>0.560</u> 0.250	<u>0.710</u> 0.400	4.90	4.75	6.00			0.40	0.10
7.00	<u>0.700</u> 0.350	<u>0.950</u> 0.600	6.40	6.20	8.00	0.60	0.10		