

Pressure regulator 17402N



Series 1700
Size 4

Air Service Units
Pressure regulator

Lockable version Detail

Ordering code


17402N^C_B

C	CONNECTIONS
	B = G 1"
	ADJUSTING RANGE
	A = 0 - 2 bar
C	B = 0 - 4 bar
	C = 0 - 8 bar
	D = 0 - 12 bar


Example: 17402NB.C
Pressure regulator with G 1" connections, adjusting range 0 - 8 bar with relieving.

3

Flow rate curves

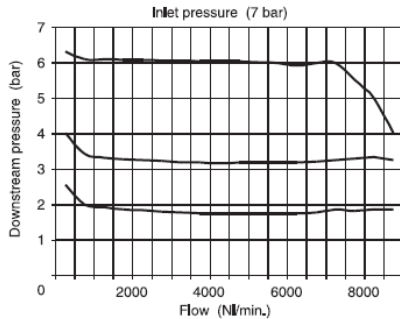

Adjustment characteristics

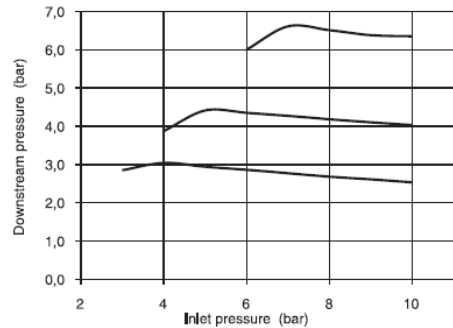

Operational characteristics

- Sensitivity combined with high relieving rates.
- High flow rate with extremely low pressure drop.
- Pressure adjusting lockable handle by simply pressing it downwards in the desired position.
- Body made with light alloy.
- Two pressure gauge connections with plug complete of seal.
- Ring nut for panel mounting.

Operational characteristics

Connections	G 1"
Max. Inlet pressure	13 bar - 1,3 MPa
Max. Inlet pressure	50°C
Pressure gauge connections	G 1/8"
Weight	gr. 1900
Pressure range	0 - 2 bar / 0 - 4 bar 0 - 8 bar / 0 - 12 bar
Assembly position	Any
Wall fixing screw	M8