DOMINGA
INDUSTRY SERVICE
UAB ”Domingos prekyba” www.dominga.lt/eshop email: info@dominga.lt
Savanorių pr. 187- 4 korp., LT-02300 Vilnius, Lietuva, tel.: +370 5 2322231, faks. + 370 5 2648229

High-Performance Hose Clips

DIN 3017 of Steel W1

- Hose clips of steel W1, chrome-VI-free zinc plated and passivated
- Optimum sealing through high band tension – maximum strip safety
- Hose-protective through rounded edges and smooth band inside
- Thinner screw body with new position, therefore improved torque
- Material and clamp range stamped at inner band side
- Hexagon screw with cross-slotted head
- Regularly spaced tension over complete hose diameter
- Up to size 90 in boxes, sizes 100–180 in plastic bags, from size 190 on loose
- For safe, fast and removable use on various hoses and fittings for different fluids

Improved Execution!

Material	Norm	Medium	Hexagon
W 1	DIN 3017	various	SW 7

High-Performance Hose Clips, band and lock steel W 1 zinc plated
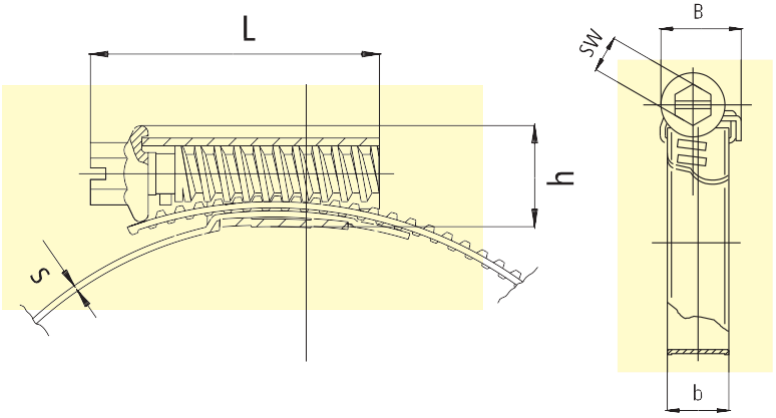
Range		Band-width	torque	Band-thickness						
mm	inch	b	max.Nm	s	B	h	L	Weight/pc. g	a	Type No.
8-12	5/18“–1/2“	9	2 + 0.5	0.7	14	11.5	20.5	12	100	HS 12
10-16	5/18“–5/8“	9	2 + 0.5	0.8	14	11.5	20.5	13	100	HS 16
12-22	1/2“–3/4“	9	3 + 0.5	0.8	14	11.5	24	16	100	HS 20
16-27	5/8“–1“	9	5 + 0.5	0.8	16	13	31	17	100	HS 25
20-32	3/4“–1 1/4“	12	5 + 0.5	0.8	16	13	31	27	50	HS 32
25-40	1“–1 5/8“	12	5 + 0.5	1.0	16	13	31	32	50	HS 40
30-45	1 3/8“–1 3/4“	12	5 + 0.5	1.0	16	13	31	33	50	HS 45
35-50	1 1/4“–2“	12	5 + 0.5	1.0	16	13	31	35	50	HS 50
40-60	1 5/8“–2 3/8“	12	5 + 0.5	1.0	16	13	31	39	25	HS 60
50-70	2“–2 3/4“	12	5 + 0.5	1.0	16	13	31	43	25	HS 70
60-80	2 3/8“–3 1/8“	12	5 + 0.5	1.0	16	13	31	45	25	HS 80
70-90	2 3/4“–3 1/2“	12	5 + 0.5	1.0	16	13	37	52	25	HS 90
80-100	3 1/8“–4“	12	5 + 0.5	1.0	16	13	37	53	10	HS 100
90-110	3 1/2“–4 3/8“	12	5 + 0.5	1.0	16	13	37	53	10	HS 110
100-120	4“–4 3/4“	12	5 + 0.5	1.0	16	13	37	58	10	HS 120
110-130	4 3/8“–5 1/8“	12	5 + 0.5	1.0	16	13	37	60	10	HS 130
120-140	4 3/4“–5 1/2“	12	5 + 0.5	1.0	16	13	37	63	10	HS 140
130-150	5 1/8“–5 7/8“	12	5 + 0.5	1.0	16	13	37	69	5	HS 150
140-160	5 1/2“–6 1/4“	12	5 + 0.5	1.0	16	13	37	71	5	HS 160
150-170	5 7/8“–6 5/8“	12	5 + 0.5	1.0	16	13	37	74	5	HS 170
160-180	6 1/4“–7“	12	5 + 0.5	1.0	16	13	37	77	5	HS 180
170-190	6 1/2“–7 1/2“	12	5 + 0.5	1.0	16	13	37	79	1	HS 190
180-200	7 1/8“–8“	12	5 + 0.5	1.0	16	13	37	81	1	HS 200
190-210	7 1/2“–8 1/4“	12	5 + 0.5	1.0	16	13	37	86	1	HS 210
200-220	8“–8 3/4“	12	5 + 0.5	1.0	16	13	37	92	1	HS 220
210-230	8 1/8“–9“	12	5 + 0.5	1.0	16	13	37	98	1	HS 230
220-240	8 3/4“–9 3/8“	12	5 + 0.5	1.0	16	13	37	101	1	HS 240
230-250	9“–9 3/4“	12	5 + 0.5	1.0	16	13	37	105	1	HS 250
240-260	9 3/8“–10 1/4“	12	5 + 0.5	1.0	16	13	37	108	1	HS 260
250-270	9 3/4“–10 1/2“	12	5 + 0.5	1.0	16	13	37	112	1	HS 270
260-280	10 1/4“–11“	12	5 + 0.5	1.0	16	13	37	116	1	HS 280