


Solenoid valve 4V, 5/2, 5/3 Series



Specifications:


| Type | 4V310-08 | 4V310-10 | 4V320-08 | 4V320-10 | 4V330C-08 | 4V330C-10 | 4V330E-08 | 4V330E-10 | 4V330P-08 | 4V330P-10 | |
|-------------------------|---------------------------|----------|----------|----------|------------------|-----------|-----------|-----------|-----------|-----------|--|
| Acting type | Internally pilot-actuated | | | | | | | | | | |
| Position number | 2 Position 5 Way | | | | 3 Position 5 Way | | | | | | |
| Port size(G) | 1/4" | 3/8" | 1/4" | 3/8" | 1/4" | 3/8" | 1/4" | 3/8" | 1/4" | 3/8" | |
| Applicable cylinders | φ 63~ φ 100mm | | | | | | | | | | |
| Fluid | Air | | | | | | | | | | |
| Lubrication | Lubricated or not | | | | | | | | | | |
| Operating Pressure(Mpa) | 0.15~0.8 | | | | | | | | | | |
| Temperature range | 5~60°C | | | | | | | | | | |
| Voltage change | ± 10% | | | | | | | | | | |
| Power consumption | AC:7.5VA DC:3W | | | | | | | | | | |

How to order:

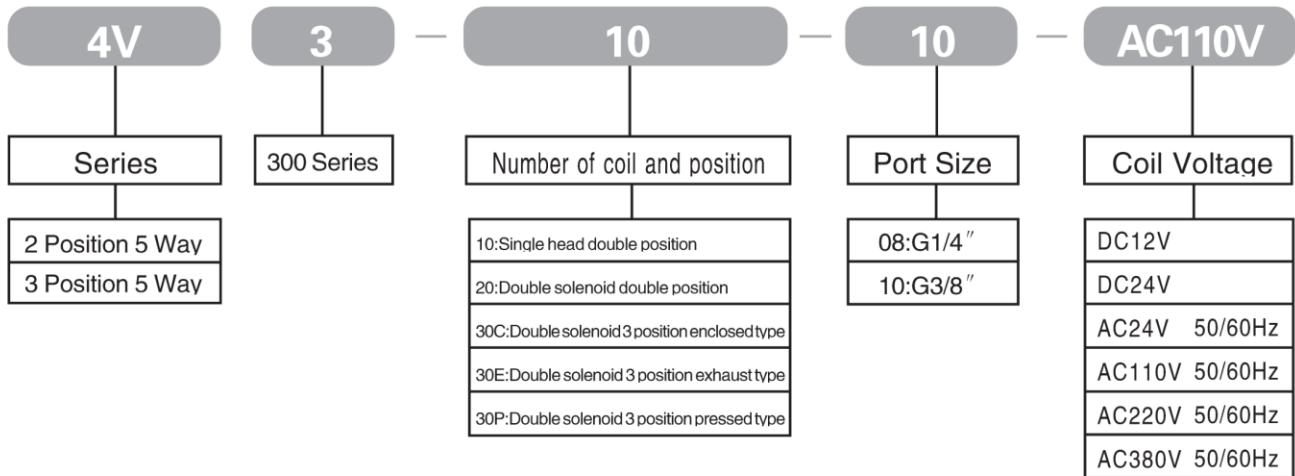

Dimensions(mm):

4V330

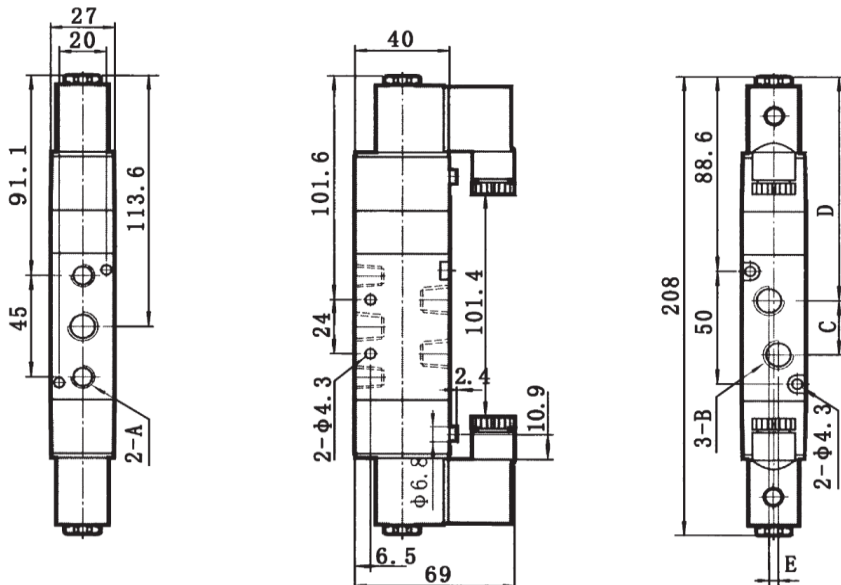

| Type | 4V330-10 |
|------|----------|
| A | G1/4 |
| B | G3/8 |
| C | 24 |
| D | 101.6 |
| E | 4 |