

SMC-610

THE LITTLE POWERHOUSE

- The best chipping quality
- Low maintenance and operating costs
- Compact structure
- Simple and intuitive operation





SMC-610

The SMC-610 is based on the successful concept of the proven SMC-812 and offers excellent cutting performance with variable cutting lengths from 15 to 35 mm.

The robust construction allows processing hardwood with diameters of up to 55 cm. Thanks to the powerful intake system with a infeed belt and three feed rollers providing a pulling force of 4,000 kg, even bulky branch and crown material is drawn in effortlessly.

With the cutting length adjustment from 15 to 35 mm and the large, two-part screen, cleanly calibrated chips with little fine material can be produced in the desired size at any time. The chipper runs smoothly and quietly, making it very economical to use. Thanks to its maintenance-friendly design, quick blade and screen base changes are guaranteed.

The chipper is operated via a simple and intuitive control system. The version with the S110 crane offers the option of saving different crane profiles.

Technical data

Infeed size	100cm x 60cm
Cutting length (adjustable)	15mm-35mm
Cutter/blade system	5 pcs, 200mm
Rotor diameter	800mm
Drive power	from 200 HP



CAN-Bus-Display



Remote control



The feed system is equipped with a strong feed belt, a large upper roller with replaceable blades, two lower rollers with aggressive teeth and a leakage system.



CONFIGURATIONS

Thanks to a wide range of equipment options, the chipper can be equipped to meet the individual needs of each customer:

ACCELERATOR

The chipper can be equipped with either a hydraulically or directly driven accelerator.



SMC-610 PT0-T with hydraulic accelerator and folded-down maintenance platform.

ROTOR


Rotor with 200 mm blade system, equipped with depth limiter for variable cutting lengths from 15–35 mm.



CRANE

The chipper is available with the following crane variants:

- SMC-610-PT0-S (crane S110F101)
- SMC-610-PT0-C (crane Q170L97)
- SMC-610-PT0-T (crane on tractor)

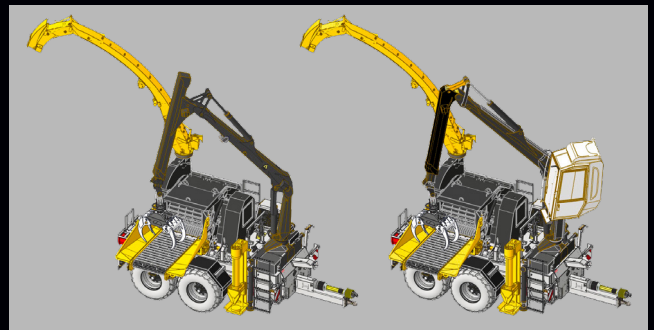

S110F101

Q170L97

KNIFE- OR BLADESYSTEM



Knife
(quick-change system)



Blade with adapter
(quick-change system)

DUO TOWER / FOLDABLE SPOUT

The long, foldable spout enables a precise loading of trailers. It also allows chips to be blown under low profile doors and openings.



CONFIGURATIONS

LOG SPLITTER

As an option a very powerful log splitter can be attached. With a split-height of 1150 mm and a pressure of 50 tons it enhances the machine considerably, because the log can be worked off without any leftover wood.



Type: Wüst, pressure: 50t, split-height: 1150mm

ADDITIONAL OPTIONS

- Camera system: rear view camera, tower camera
- Screen holder
- Field tyres
- Compressed air connection on platform
- Compressed air hose reel
- Reversing flap incl. frame
- LED lighting
- Central lubrication system
- Trailer coupling
- Reversing signal

