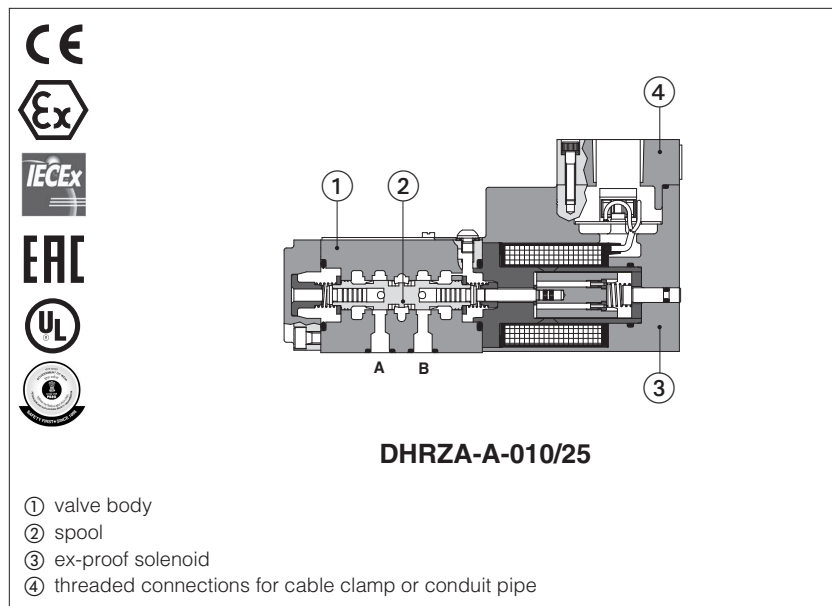


# Ex-proof proportional reducing valves

direct, without transducer - **ATEX, IECEx, EAC, PESO** or **cULus**



## DHRZA-A

Ex-proof proportional pressure reducing valves, direct, without transducer, for pressure reduction in low flow systems or piloting lines.

They are equipped with ex-proof proportional solenoids certified for safe operations in hazardous environments with potentially explosive atmosphere.

Certifications:

- Multicertification **ATEX, IECEx, EAC** and **PESO** for gas group **II 2G** and dust category **II 2D**
- Multicertification **ATEX** and **IECEx** for gas group **I M2** (mining)
- **cULus** North American certification for gas group **C&D**

The flameproof enclosure of solenoid prevents the propagation of accidental internal sparks or fire to the external environment.

The solenoid is also designed to limit the surface temperature within the classified limits.

Size: **06** - ISO 4401  
Max flow: **24 l/min**  
Max pressure: **25 bar**

## 1 MODEL CODE

<b>DHRZA</b>	/	*	-	A	-	010	/	25	-	M	/	*	/	*	/	*	/	*	
Ex-proof proportional pressure reducing valves, direct <b>DHRZA</b> = size 06																			Seals material, see section 6: - = NBR <b>PE</b> = FKM <b>BT</b> = HNBR (2)
<b>Certification type:</b> Multicertification: - = omit for Group II 2G / 2D (1) <b>M</b> = Group I M2 (mining) North American Certification: <b>UL</b> = cULus																			Series number
<b>A</b> = without transducer																			<b>Voltage code:</b> - = standard coil for 24 VDC Atos drivers <b>24</b> = optional coil for 24 VDC low current drivers
<b>010</b> = reduced port A <b>012</b> = reduced ports A and B																			<b>Options (3):</b> <b>B</b> = flow reduced on port B (solenoid on side A) <b>O</b> = horizontal cable entrance (2) <b>WP</b> = ⚠ manual override protected by metallic cap
<b>25</b> = reduced pressure range 3÷25 bar																			<b>Solenoid threaded connection</b> for cable gland fitting: <b>GK</b> = GK-1/2" - not for <b>cULus</b> (4) <b>M</b> = M20x1,5 - not for <b>cULus</b> <b>NPT</b> = 1/2" NPT

- (1) The valves with Multicertification for Group II are also certified for Indian market according to **PESO** (Petroleum and Explosives Safety Organization). The PESO certificate can be downloaded from [www.atos.com](http://www.atos.com)
- (2) Not for multicertification **M** group I (mining)      (3) Possible combined options: all combinations are available
- (4) Approved only for Italian market

## 2 ELECTRONIC DRIVERS

Electronic drivers are factory set with max current limitation for ex-proof valves.




Please include in the driver order also the complete code of the connected ex-proof proportional valve.

Drivers model	E-BM-AS-* /A	E-BM-AES-* /A
Type	digital	digital
Format	DIN-rail panel	
Data sheet	G030	GS050

### 3 GENERAL CHARACTERISTICS

Assembly position	Any position
Subplate surface finishing to ISO 4401	Acceptable roughness index, Ra ≤0,8 recommended Ra 0,4 - flatness ratio 0,01/100
MTTFd valves according to EN ISO 13849	150 years, see technical table P007
Ambient temperature range	<b>Standard</b> = -20°C ÷ +70°C <b>/PE</b> option = -20°C ÷ +70°C <b>/BT</b> option = -40°C ÷ +70°C
Storage temperature range	<b>Standard</b> = -20°C ÷ +80°C <b>/PE</b> option = -20°C ÷ +80°C <b>/BT</b> option = -40°C ÷ +70°C
Surface protection	Zinc coating with black passivation - salt spray test (EN ISO 9227) > 200h
Compliance	Explosion proof protection, see section 7 -Flame proof enclosure "Ex d" -Dust ignition protection by enclosure "Ex t" RoHs Directive 2011/65/EU as last update by 2015/65/EU REACH Regulation (EC) n°1907/2006

### 4 HYDRAULIC CHARACTERISTICS

Hydraulic symbols			
	<b>DHRZA-A-010/25*</b>	<b>DHRZA-A-010/25/B*</b>	<b>DHRZA-A-012/25*</b>
Max regulated pressure (Q=1 l/min) [bar]	25		
Min. regulated pressure (Q=1 l/min) [bar]	3		
Max. pressure at port P [bar]	315		
Max. pressure at port T [bar]	210		
Max. flow [l/min]	24		
Response time 0-100% step signal (depending on installation) [ms]	≤ 45		
Hysteresis [% of the max pressure]	≤ 1,5		
Linearity [% of the max pressure]	≤ 3		
Repeatability [% of the max pressure]	≤ 2		

Above performance data refer to valves coupled with Atos electronic drivers, see section 2

### 5 ELECTRICAL CHARACTERISTICS

Max. power	35W	
Insulation class	H (180°) Due to the occurring surface temperatures of the solenoid coils, the European standards ISO 13732-1 and EN982 must be taken into account	
Protection degree with relevant cable gland	<b>Multicertification:</b> IP66/67 to DIN EN60529 <b>UL:</b> raintight enclosure, UL approved	
Duty factor	Continuous rating (ED=100%)	
Voltage code	standard	option /24
Coil resistance R at 20°C	3,2 Ω	17,6 Ω
Max. solenoid current	2,5 A	1,1 A

### 6 SEALS AND HYDRAULIC FLUIDS - for other fluids not included in below table, consult our technical office

Seals, recommended fluid temperature	NBR seals (standard) = -20°C ÷ +60°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C HNBR seals (/BT option) = -40°C ÷ +60°C, with HFC hydraulic fluids = -40°C ÷ +50°C		
Recommended viscosity	20 ÷ 100 mm <sup>2</sup> /s - max allowed range 15 ÷ 380 mm <sup>2</sup> /s		
Max fluid contamination level	normal operation	ISO4406 class 18/16/13 NAS1638 class 7	see also filter section at
	longer life	ISO4406 class 16/14/11 NAS1638 class 5	www.atos.com or KTF catalog
<b>Hydraulic fluid</b>	<b>Suitable seals type</b>	<b>Classification</b>	<b>Ref. Standard</b>
Mineral oils	NBR, FKM, HNBR	HL, HLP, HLPD, HVLP, HVLPD	DIN 51524
Flame resistant without water	FKM	HFDU, HFDR	ISO 12922
Flame resistant with water (1)	NBR, HNBR	HFC	

⚠ The ignition temperature of the hydraulic fluid must be 50°C higher than the max solenoid surface temperature

#### (1) Performance limitations in case of flame resistant fluids with water:

- max operating pressure = 210 bar
- max fluid temperature = 50°C

## 7 CERTIFICATION DATA

Valve type	DHRZA, DKZA		DHRZA/M, DKZA/M	DHRZA/UL, DKZA/UL	
Certifications	Multicertification Group II <b>TEX IECEx EAC PESO</b>		Multicertification Group I <b>ATEX IECEx</b>	North American <b>cULus</b>	
Solenoid certified code	<b>OZA-A</b>		<b>OZAM-A</b>	<b>OZA-A/EC</b>	
Type examination certificate (1)	ATEX: CESI 02 ATEX 014 IECEX: IECEX CES 10.0010x EAC: TC RU C-IT. 08.B.01784 PESO: P338131		ATEX: CESI 03 ATEX 057x IECEX: IECEX CES 12.0007x	20170324 - E366100	
Method of protection	<ul style="list-style-type: none"> <li>• ATEX, EAC Ex II 2G Ex d IIC T4/T3 Gb Ex II 2D Ex tb IIIC T135°C/T200°C Db</li> <li>• IECEx Ex d IIC T4/T3 Gb Ex tb IIIC T135°C/T200°C Db</li> <li>• PESO Ex II 2G Ex d IIC T4/T3 Gb</li> </ul>		<ul style="list-style-type: none"> <li>• ATEX Ex I M2 Ex db I Mb</li> <li>• IECEx Ex db I Mb</li> </ul>	<ul style="list-style-type: none"> <li>• UL 1203 Class I, Div. I, Groups C &amp; D Class I, Zone I, Groups IIA &amp; IIB</li> </ul>	
Temperature class	<b>T4</b>	<b>T3</b>	-	<b>T4</b>	<b>T3</b>
Surface temperature	≤ 135 °C	≤ 200 °C	≤ 150 °C	≤ 135 °C	≤ 200 °C
Ambient temperature (2)	-40 ÷ +40 °C	-40 ÷ +70 °C	-20 ÷ +60 °C	-40 ÷ +55 °C	-40 ÷ +70 °C
Applicable standards	EN 60079-0: 2012+A11:2013 EN 60079-1:2014 EN 60079-31:2014		IEC 60079-0:2017 IEC 60079-1:2017-04 IEC 60079-31:2013	UL 1203 and UL429, CSA 22.2 n°30-1986 CSA 22.2 n°139-13	
Cable entrance: threaded connection vertical (standard) or horizontal (option /O)			<b>GK</b> = GK-1/2" <b>M</b> = M20x1,5 <b>NPT</b> = 1/2" NPT	1/2" NPT	

(1) The type examiner certificates can be downloaded from [www.atos.com](http://www.atos.com)

(2) The solenoids **Group II** and **cULus** are certified for minimum ambient temperature -40°C

In case the complete valve must withstand with minimum ambient temperature of -40°C, select **/BT** in the model code

**⚠ WARNING: service work performed on the valve by the end users or not qualified personnel invalidates the certification**

## 8 EX PROOF SOLENOIDS WIRING

**Multicertification**

**Standard version**                      **Option /O**

① cover with threaded connection for vertical cable gland fitting  
 ② cover with threaded connection for horizontal cable gland fitting  
 ③ terminal board for cables wiring  
 ④ standard manual override  
 ⑤ screw terminal for additional equipotential grounding

**cULus certification**

**Standard version**                      **Option /O**

① cover with threaded connection for vertical cable gland fitting  
 ② cover with threaded connection for horizontal cable gland fitting  
 ③ terminal board for cables wiring  
 ④ standard manual override

**⚠ Pay attention to respect the polarity**

alternative GND screw terminal connected to solenoid housing

**9 CABLE SPECIFICATION AND TEMPERATURE** - Power supply and grounding cables have to comply with following characteristics:

**Multicertification Group I and Group II**

**Power supply:** section of coil connection wires = 2,5 mm<sup>2</sup>

**Grounding:** section of internal ground wire = 2,5 mm<sup>2</sup>  
section of external ground wire = 4 mm<sup>2</sup>

**cULus certification:**

- Suitable for use in Class I Division 1, Gas Groups C
- Armored Marine Shipboard Cable which meets UL 1309
- Tinned Stranded Copper Conductors
- Bronze braided armor
- Overall impervious sheath over the armor

Any Listed (UBVZ/UBVZ7) Marine Shipboard Cable rated 300 V min, 15A min. 3C 2,5 mm<sup>2</sup> (14 AWG) having a suitable service temperature range of at least -25°C to +110°C ("BT" Models require a temperature range from -40°C to +110°C)

**Note 1:** For Class I wiring the 3C 1,5 mm<sup>2</sup> AWG 16 cable size is admitted only if a fuse lower than 10 A is connected to the load side of the solenoid wiring.

**9.1 Cable temperature**

The cable must be suitable for the working temperature as specified in the "safety instructions" delivered with the first supply of the products.

**Multicertification**

Max ambient temperature [°C]	Temperature class		Max surface temperature [°C]		Min. cable temperature [°C]	
	Goup I	Goup II	Goup I	Goup II	Goup I	Goup II
40 °C	-	T4	150 °C	135 °C	90 °C	90 °C
45 °C	-	T4	-	135 °C	-	95 °C
55 °C	-	T3	-	200 °C	-	110 °C
60 °C	-	-	150 °C	-	110 °C	-
70 °C	N.A.	T3	N.A.	200 °C	N.A.	120 °C

**cULus certification**

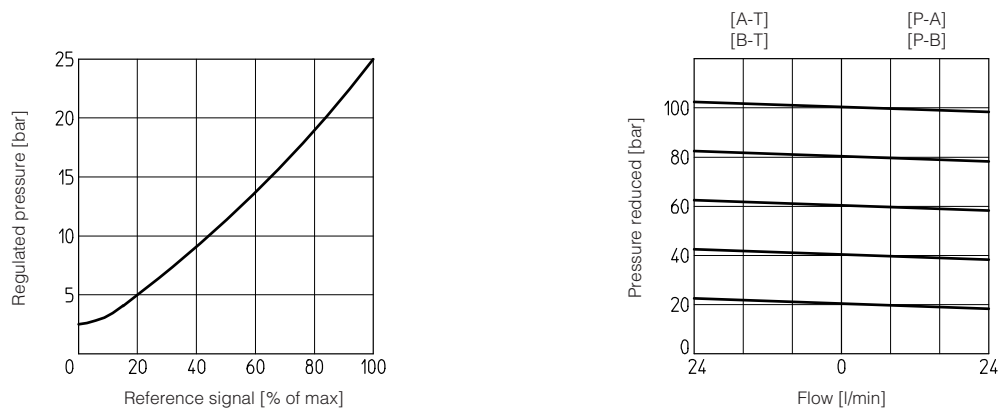
Max ambient temperature [°C]	Temperature class	Max surface temperature [°C]	Min. cable temperature
55 °C	T4	135 °C	100 °C
70 °C	T3	200 °C	100 °C

**10 CABLE GLANDS** - only Multicertification


Cable glands with threaded connections GK-1/2", 1/2"NPT or M20x1,5 for standard or armoured cables have to be ordered separately, see tech. table **KX800**

**Note:** a Loctite sealant type 545, should be used on the cable gland entry threads

**11 DIAGRAMS** based on mineral oil ISO VG 46 at 50°C



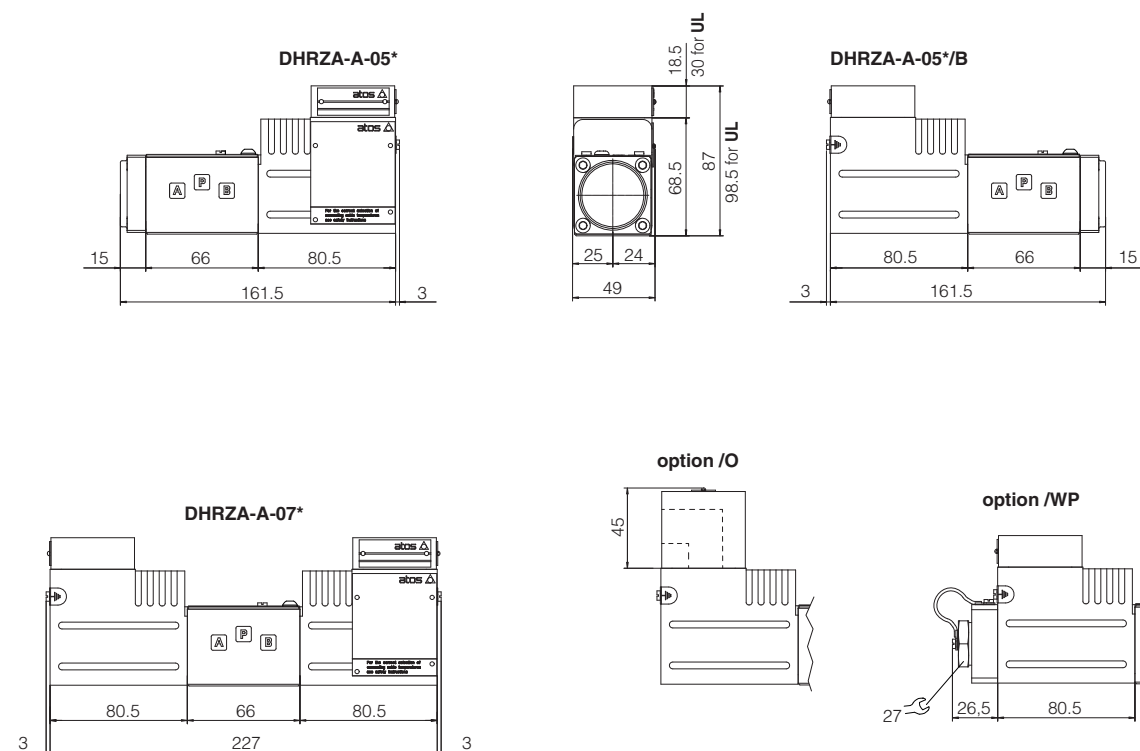
**12 FASTENING BOLTS AND SEALS**

	<p><b>DHZA</b></p> <p><b>Fastening bolts:</b> 4 socket head screws M5x50 class 12.9 Tightening torque = 8 Nm</p>	<p><b>DKZA</b></p> <p><b>Fastening bolts:</b> 4 socket head screws M6x40 class 12.9 Tightening torque = 15 Nm</p>
	<p><b>Seals:</b> 4 OR 108; Diameter of ports P, A, B, T: <math>\varnothing</math> 7,5 mm (max) 1 OR 2025 Diameter of port Y: <math>\varnothing</math> = 3,2 mm (only for /Y option)</p>	<p><b>Seals:</b> 5 OR 2050; Diameter of ports P, A, B, T: <math>\varnothing</math> 11,5 mm (max) 1 OR 108 Diameter of port Y: <math>\varnothing</math> = 5 mm (only for /Y option)</p>

**13 INSTALLATION DIMENSIONS FOR DHRZO [mm]**

ISO 4401: 2005 (see table P005)  
 Mounting surface: 4401-03-02-0-05  
 (for /Y surface: 4401-03-03-0-05 without port X)

Mass [kg]	
DHRZA-A-05	2,65
DHRZA-A-07	4,3
Option /O	+0,35
Option /WP	+0,25



**14 RELATED DOCUMENTATION**

- X010** Basics for electrohydraulics in hazardous environments
- X020** Summary of Atos ex-proof components certified to ATEX, IECEX, EAC, PESO
- X030** Summary of Atos ex-proof components certified to cULus
- FX900** Operating and maintenance information for ex-proof proportional valves
- KX800** Cable glands for ex-proof valves
- P005** Mounting surfaces for electrohydraulic valves